

# ROBUS<sup>®</sup>

## VEGAS 240W WI-FI CONTROLLER, IP20, SINGLE COLOUR/RGB/RGBW

### RVACCT1-WIFI RVARGB-WIFI RVARGBW-WIFI

**PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES. ! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician**


**Note:**

**Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site [www.robust.com](http://www.robust.com)**

-10°C < Ta < +40°C, DC12-24V, Class III, IP20, Wireless type: 2.4G Wi-fi, 12V Max load: 120W, 24V Max load: 240W  
Warning! To prevent overheating, the fitting or driver must not be covered by thermal insulation.

### Installation

1. If products are used outdoors please use IP enclosure RVBIP2.
2. Connect 12/ 24 V Supply to input terminals DC+ & DC- .
3. Single colour: LED Strip connection: Positives Red "+" to V+; negative Black "-" to V+.
4. RGB: LED Strip connection: Positives Black "+" to V+. Connect Red wire to R, connect Green wire to G, Connect Blue wire to B.
5. RGBW: LED Strip connection: Positives Black "+" to V+. Connect Red wire to R, connect Green wire to G, Connect Blue wire to B, Connect White wire to W.
6. To put the luminaire in pairing mode, press and hold the reset button for >8 seconds. Alternatively, if the switch is inaccessible, turn on for 10 seconds, turn off - on - off - on - off - on. The luminaire will blink rapidly when in pairing mode. Download the ROBUS CONNECT app and follow the instructions in the User Guide to pair the luminaire

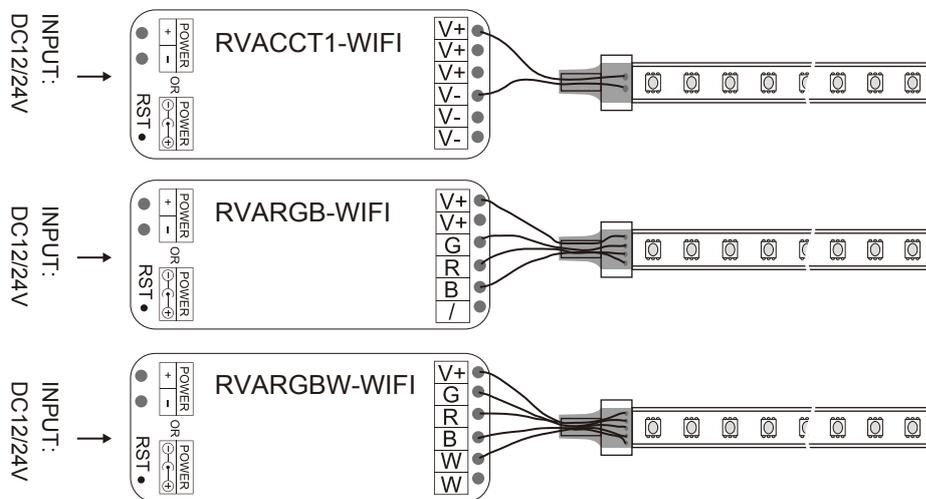

Scan QR to download the APP



### Information for the Product user:

1. Please note the requirement to dispose of Waste Electrical & Electronic Equipment separately from household waste (WEEE marked with crossed out wheelie bin symbol).
2. Please consider your role in contributing to re-use and recycling by returning this product at end of life to a collection centre for waste electrical equipment or a Civic Amenity site, or to a retail outlet from which you are purchasing a replacement.
3. This equipment may contain substances that are hazardous to health and the environment if disposed of carelessly. It is important that it is separated from normal household waste and recycled in the WEEE chain
4. The "crossed out wheelie bin symbol" on a product indicates this equipment must not be disposed of in normal household waste, but should be disposed of according to local WEEE regulations

**The Installation must be carried out by a qualified electrician**

LED Group Australasia  
9/210 Queensport Road North  
Murarrie  
QLD 4172  
Australia

Tel: 07 3890 5444  
Fax: 07 3890 4777  
Email: [purchases@robust.com](mailto:purchases@robust.com)  
Website: [www.robust.com.au](http://www.robust.com.au)

LED Group  
Crowe Hogwarth  
72 Trafalgar Square  
NELSON 7010  
New Zealand

Tel: +64 0508 533 335  
Email: [nz\\_purchases@robust.com](mailto:nz_purchases@robust.com)  
Website: [www.robust.com.au](http://www.robust.com.au)

