


# Cable tie support – Plug bases

MCO8024

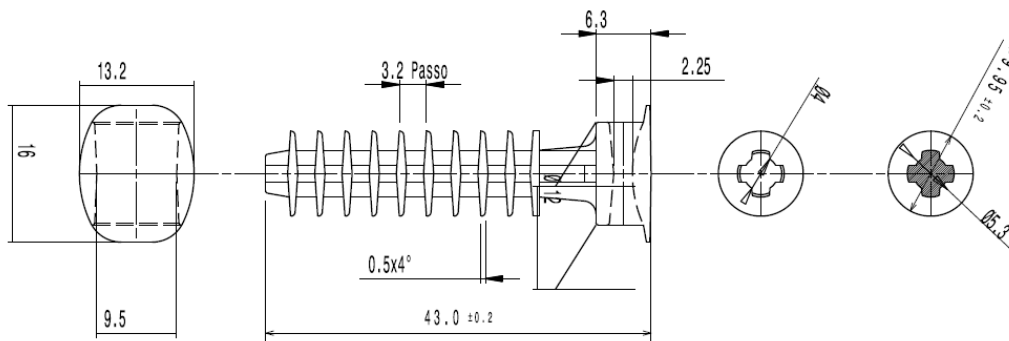

## Technical data

- Material: Polyamide 6 black
- Flammability of raw material: UL 94 – HB
- Humidity absorption: 3% (23° C - 50% R.H.)
- Installation temperature: -15° C ÷ +65° C
- Working temperature: - 20° C ÷ +70° C



Code	AVG tensile strenght (N) *
SP 8C	250

\* Test laboratory results ± 5%  
Tensile speed: 25 mm/min.

**EC Directives** : Raw material used to produce cable ties is compliant with EC Directives: 2002/95/EC (RoHS)