

CONTEG, spol. s r.o.

Conteg Czech Republic Headquarters:

Na Vítězné pláni 1719/4
140 00 Prague 4

Tel.: +420 261 219 182

Fax: +420 261 219 192

Local Branche/Office

Benelux: +31 76 5420 709



CONTEG, spol. s r.o.

Production plant in the Czech Republic:

K Silu 2179
393 01 Pelhřimov

Tel.: +420 565 300 300

Fax: +420 565 533 955

iSEVEN RI7 Cabinet


Code: RI7-48-80/80-WVVVA-204-B

- Type:** RI7 freestanding cabinet; frame sheet steel welded construction
Height: 48U (2245 mm)
Width: 800 mm
Depth: 800 mm
Load rating: 500 kg (balanced load)
Colour: Light grey RAL7035

Picture with
glass door



Frame

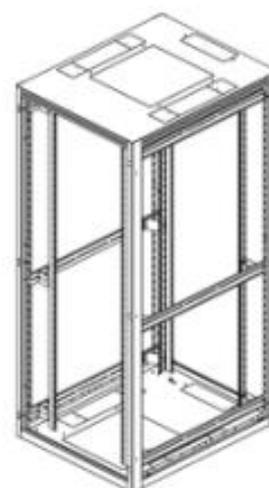

Extrusions:

L-type 19inch extrusions (mounting rails)

Sliding, adjustable depth setting from inside

1 pair in front, 1 pair in rear

U-height indications: on the left 19inch profile numbers stamped in the profile for each U position, and markers to define start & end of U position; on the right 19inch profile markers to define start & end of U position; valid for front and rear profiles



Front Door:

Vented door, perforation rate 86%;

Hinges standard on the right side, easy re-hanging to open left;

Doors opening angle 180°;

Front Door Lock:

Swivel handle lock, DIN profile, universal key 333, singlepoint;

W



Vented door 86%
requires multipoint lock



Door perforation
rate 86%

Rear Door:

Vented door, perforation rate 86%;

Hinges standard on the right side, easy re-hanging to open left;

Doors opening angle 180°;

Rear Door Lock:

Swivel handle lock, DIN profile, universal key 333, singlepoint;

W



Vented door 86%
requires multipoint lock

Side Panels:

2 side panels, sheet steel, universal key

Racks can be installed in rows and bolted together, with or without side panels, buying kit is ordered separate



Plates:

Standard top and bottom plate (fixed)



With knockouts for cable entries:

Extended opening size in racks 800x800mm, dimensions 500x115mm, at both sides of top and bottom plate; consists of 3 parts, 300x115mm and 2x 100x115mm, each can be opened individually; options to order separately when knockout is opened: brush (DP-KP-KAR-6), or protection by rubber piece on the steel plate (DP-KP-LEM-6), or blank panel to close again

Openings dimensions 300x100mm at rear side of top and bottom plate; options to order separately when knockout is opened: brush (DP-KP-KAR), or protection by rubber piece on the steel plate (DP-KP-LEM-6), or blank panel to close again

With knockout for ventilation unit:

Size 420x280mm for 800mm deep racks

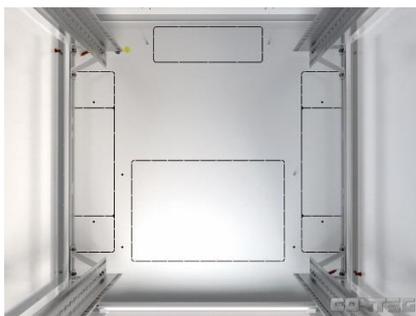

Adjustable feet:

Included; castors or plinth are optional, order separate



Earth kit:

Included; connecting doors and panels; stud for connecting building earth wire (building earth wire not included)

28 mounting kits: Caged nuts & bolts M5



Colour: RAL 7035 (light grey)

RAL 7035

IP Rating: IP20 (with vented doors)