

**CONTEG, spol. s r.o.**

**Conteg Czech Republic Headquarters:**

Na Vítězné pláni 1719/4  
140 00 Prague 4

Tel.: +420 261 219 182

Fax: +420 261 219 192

**Local Branche/Office**

Benelux: +31 76 5420 709



**CONTEG, spol. s r.o.**

**Production plant in the Czech Republic:**

K Silu 2179  
393 01 Pelhřimov

Tel.: +420 565 300 300

Fax: +420 565 533 955

## iSEVEN RI7 Cabinet


**Code:** RI7-27-80/100-GVGVA-303-B

**Type:** RI7 freestanding cabinet; frame sheet steel welded construction  
**Height:** 27U (1311 mm)  
**Width:** 800 mm  
**Depth:** 1000 mm  
**Load rating:** 300 kg (balanced load)  
**Colour:** Light grey RAL7035

Picture with glass  
door / steel door



Frame

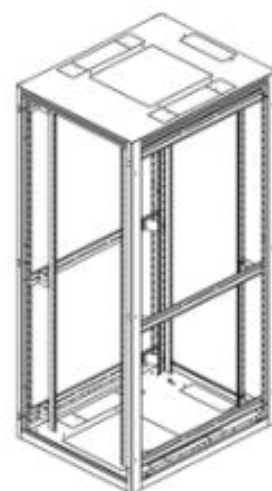

**Extrusions:**

L-type 19inch extrusions (mounting rails)

Sliding, adjustable depth setting from inside

1 pair in front, 1 pair in rear

U-height indications: on the left 19inch profile numbers stamped in the profile for each U position, and markers to define start & end of U position; on the right 19inch profile markers to define start & end of U position; valid for front and rear profiles

**Front Door:**

Glass door with security glass (EN 12150-1);

Hinges standard on the right side, easy re-hanging to open left;

Door opening angle 180°

**Front Door Lock:**

Swivel handle lock, DIN profile, universal key 333, singlepoint

**Rear Door:**

Glass door with security glass (EN 12150-1);

Hinges standard on the right side, easy re-hanging to open left;

Door opening angle 180°

**Rear Door Lock:**

Swivel handle lock, DIN profile, universal key 333, singlepoint



### Side Panels:

2 side panels, sheet steel, universal key

Racks can be installed in rows and bolted together, with or without side panels, baying kit is ordered separate



### Plates:

Standard top and bottom plate (fixed)


With knockouts for cable entries:

Extended opening size in racks 800x1000mm, dimensions 500x115mm, at both sides of top and bottom plate; consists of 3 parts, 300x115mm and 2x 100x115mm, each can be opened individually; options to order separately when knockout is opened: brush (DP-KP-KAR-6), or protection by rubber piece on the steel plate (DP-KP-LEM-6), or blank panel to close again

Openings dimensions 300x100mm at rear side of top and bottom plate; options to order separately when knockout is opened: brush (DP-KP-KAR), or protection by rubber piece on the steel plate (DP-KP-LEM-6), or blank panel to close again

With knockout for ventilation unit:

Size 420x440mm for 1000mm deep racks

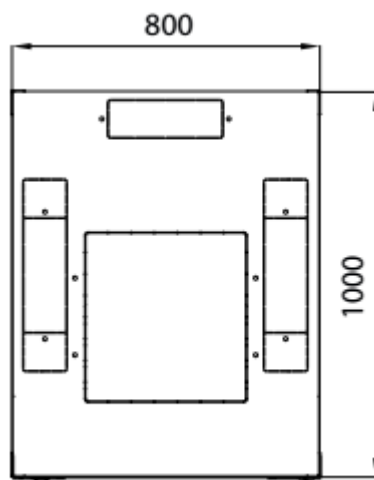

**Adjustable feet:**

Included; castors or plinth are optional, order separate

**Earth kit:**

Included; connecting doors and panels; stud for connecting building earth wire (building earth wire not included)

**28 mounting kits:** Caged nuts & bolts M5



**Colour:** RAL 7035 (light grey)

**RAL 7035**

**IP Rating:** IP30 (with glass/ plain steel doors)