SEC3-A5A1B1BAOOO



NOVUX™ SEC Closure, splice only, no adapters, no splitters, mounting included, black

- Design optimized for FTTH façade applications with gray and black colors
- Agnostic to connectivity technologies: splice, connector, field-installable connector for agility and flexibility
- Innovative removable hinge design allows cover to open from the left, right, or top
- Identification plate for either QR code or customer logo
- QR code and CommScope cTrak® app for one-click access to all product information

Product Classification

Regional Availability

Asia | EMEA | Latin America | North America

Product Type In-line, rectangular fiber closure

Product Brand NOVUX™

Product Series SEC

General Specifications

 Cable Capacity, Branch
 2 Round 1.8-7.0 mm (0.07-0.27 in)

 Cable Capacity, Drop
 6 Round 1.8-7.0 mm (0.07-0.27 in)

Cable Capacity, Feeder 2 Round 9.0–12.0 mm (0.35–0.47 in)

Cable Ports Quantity, total10 round ports

 Cable Sealing Type
 Gasket/grommet configuration

Closure Sealing Type Hinged with lock

Color Black

Mounting Facade | Wall

Network Area Type Drop

Port Type No adapter

Splice Tray Included, quantity 1

Splice Tray Type Included 12-way, heat shrink

Splices per Tray, quantity 12
Splicing Capacity, maximum 12
Splicing Capacity, Single Fusion, maximum 12

Splicing Type, Supported Single fusion



SEC3-A5A1B1BA000


Dimensions

 Height
 117 mm | 4.606 in

 Width
 210 mm | 8.268 in

 Depth
 50 mm | 1.969 in

Ordering Tree

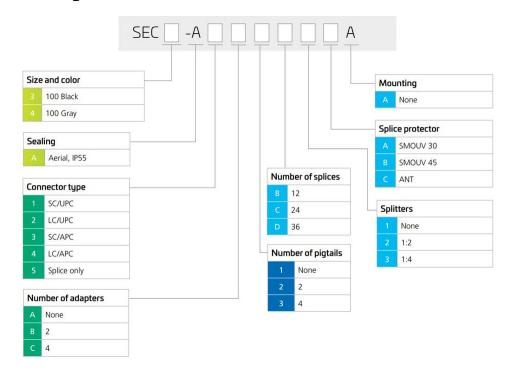

Optical Specifications

Fiber Type G.657.A1 | G.657.A2 | G.657.B3

Environmental Specifications

Environmental Space Facade | Outdoor

Qualification Standards IP55

UV Resistance UV stabilized

Packaging and Weights

Packaging quantity 1

Packaging Type Box | Carton

COMMSCOPE®

SEC3-A5A1B1BA000

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted

50)