
Twin Wall Technology



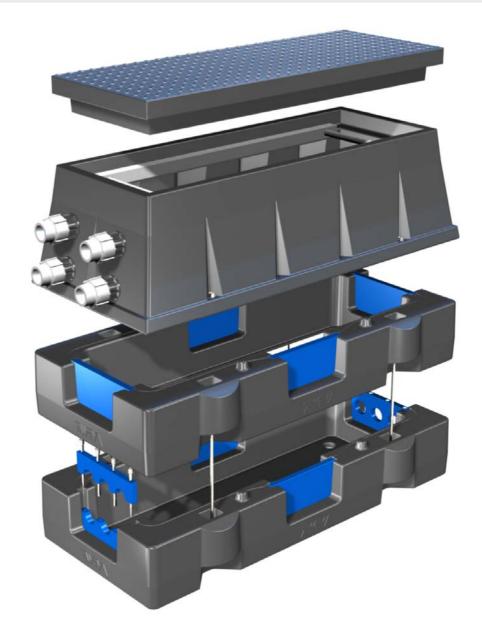

Access Chamber Z8P2M


Parts:Material:Weight:Housing Z8Polyethylene18 kg.Cover PPolyethylene13 kg.FrameGalvanized steel5 kg.Modular RingPolyethylene2 x 10 kg.

Place of installation:

Group 1 and 2 in accordance with **EN125**. Cover min. 300 mm below surface level.

Various options available:

Locking, Badging, Duct entries.



T+31(0)70 358 6984

1/2005

F+31(0)70 358 6987

E info@zweva.nl

www.zweva.com

Zweva Rotomoulding NV