


Description

- APC polishing (Angled Physical Contact) assures excellent optical parameters of connector
- G652.D single mode fiber (OS2)
- Easystrip - stripability minimum 1 mtr in one step
- Fiber is colored on primary (250 μ m) and secondary (900 μ m) coating
- Length 2 mtr (-0/+11 cm)

Ordering code: 002SAXX09S9

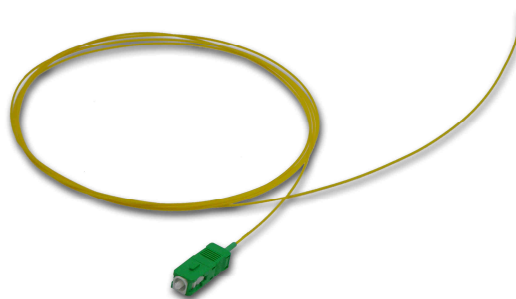

Technical information

- Optical parameters:
Guaranteed: IL < 0,35 dB, RL > 60 dB
Typical: IL = 0,11 dB, RL = 65 dB
- RoHS compliance
- Colour of connector housing/boot: green/green
- Colour of fiber primary/secondary coating: yellow/yellow
- Technical parameters of connector:
SC style connector is manufactured in accordance to ANSI, IEC, TIA/EIA, NTT and JIS specifications, and meets Telcordia GR 326 CORE requirements
Connector head/ferrule diameter: 2,5 mm
Connector ferrule: Zirconia
Push-pull latched locking type connector
8° angle polishing for excellent RL parameters
Durability: delta IL < 0,1 dB after 500 mating cycles
Crush resistance according to IEC 60794-1-2-E3
- Technical parameters of fiber:
Cable outer diameter: 0,9 mm
Material of jacket: LSZH, yellow
Core/Cladding diameter: 9/125 μ m
Fiber meets ITU-T G652.D, EN/IEC 60793-2-50 Type B1.3 and Telcordia's GR 20 CORE
One-step stripping length: minimum 1m

Logistic parameters

- 12 pcs of pigtails in plastic bag
- Minimum Order Quantity = Standard Packaging Quantity = 12 pcs
- Label with product description on plastic bag
- Total weight of one package: 60 g.

Warranty: 2 years