


Standard patchcords

Basic characteristics

- ▲ Standard simplex and duplex patchcords with all standard connectors

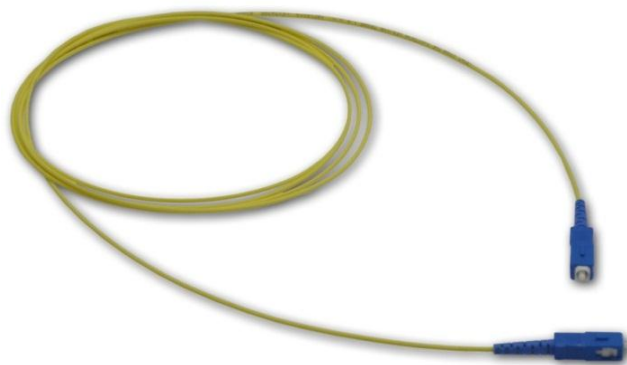

Applications

- ▲ Telecom / Datacom
- ▲ Telehouse interconnections
- ▲ DataCenter

Temperature range

Controlled environment (-10°C/+60°C)

Cable parameters

Jacket material	LSZH	
Cable construction	Simplex or duplex	
Outer diameter	approx. 1,8mm/2.8mm	
Fiber count	1 or 2	
Fiber type	SM OS2 or MMF OM1/OM2/OM3/OM4	
Temperature range	operation:	-10°C to +70°C
	storage:	-25°C to +70°C
	installation:	-5°C to +50°C

Connector parameters

	LC, SC, ST, FC, E2000 (SM)	LC, SC, ST, FC, E2000 (MM)
Insertion Loss	<0,25dB	<0,25dB
Return Loss	>50dB (UPC)/>60dB (APC)	>30dB

Identification

Traceability label with unique serial number on both ends of cable assembly.

Packaging

Each assembly in sealed PE bag, bulk pack in cardboard box.

* Specifications are subject to change without notice

For more information contact our sales team at sales@sylex.sk