


Technical data sheet for:

KKHR 32, 40 and 50

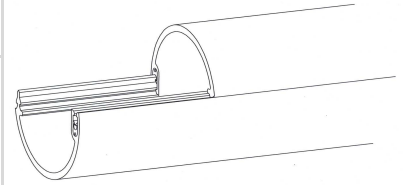

General data

Item	Split duct, KKHR 32,40 and 50	
Description	Consists of 2 half shells, for pressure tight repair damages in PE duct or close blow in area in combination with EBM.	
Optional	To install the split ducts, it is necessary to use the according assembly tool.	
Package unit	KKHR Ø 32mm x 2000mm:	2 pieces / unit; 84 pieces / pallet
	KKHR Ø 40mm x 2000mm:	2 pieces / unit; 68 pieces / pallet
	KKHR Ø 50mm x 2000mm:	3 pieces / unit; 51 pieces / pallet
Production length	2000mm	

Technical data

Quality	Value	Unit
Material	PolyVenylChlorid - Unplastinized PVC-U	
Dimension	d = 32,0 ^{+0,2} ; s = 1,8 ^{+0,4}	mm
	d = 40,0 ^{+0,2} ; s = 1,9 ^{+0,4}	
	d = 50,0 ^{+0,2} ; s = 2,4 ^{+0,5}	
Pressure	0,5 (permanent gas- and watertight)	bar
	10 / 30	bar / min
	mastic (enclosed at the sleeves) is to use according installation instruction	

gabocom is certified by the quality system following DIN EN ISO 9001:2008

gabo Systemtechnik GmbH
 Am Schaidweg 7
 94559 Niederwinkling
 Germany

Phone 0049 (0)9962 950 200
 Fax 0049 (0)9962 950 202
 info@gabocom.de
 www.gabocom.de

Editor: PW
 Release: MK
 Edition: 15.11.2011

No responsibility is taken for the correctness, currency and completeness of details and information.
 Liability for damages is excluded.