


**Technical data sheet for:**

## KKHR 32, 40 and 50

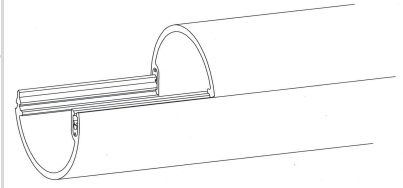

### General data

<b>Item</b>	Split duct, KKHR 32,40 and 50	
<b>Description</b>	Consists of 2 half shells, for pressure tight repair damages in PE duct or close blow in area in combination with EBM.	
<b>Optional</b>	To install the split ducts, it is necessary to use the according assembly tool.	
<b>Package unit</b>	KKHR Ø 32mm x 2000mm:	2 pieces / unit; 84 pieces / pallet
	KKHR Ø 40mm x 2000mm:	2 pieces / unit; 68 pieces / pallet
	KKHR Ø 50mm x 2000mm:	3 pieces / unit; 51 pieces / pallet
<b>Production length</b>	2000mm	

### Technical data

Quality	Value	Unit
<b>Material</b>	PolyVenylChlorid - Unplastinized PVC-U	
<b>Dimension</b>	$d = 32,0^{+0,2}; s = 1,8^{+0,4}$	mm
	$d = 40,0^{+0,2}; s = 1,9^{+0,4}$	
	$d = 50,0^{+0,2}; s = 2,4^{+0,5}$	
<b>Pressure</b>	0,5 (permanent gas- and watertight)	bar
	10 / 30	bar / min
	mastic (enclosed at the sleeves) is to use according installation instruction	

**gabocom is certified by the quality system following DIN EN ISO 9001:2008**

gabo Systemtechnik GmbH  
 Am Schaidweg 7  
 94559 Niederwinkling  
 Germany

Phone 0049 (0)9962 950 200  
 Fax 0049 (0)9962 950 202  
 info@gabocom.de  
 www.gabocom.de

Editor: PW  
 Release: MK  
 Edition: 15.11.2011

No responsibility is taken for the correctness, currency and completeness of details and information.  
 Liability for damages is excluded.