


**Technical data sheet for:**

## KKHR 110 und 125

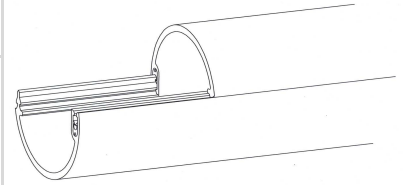

### General data

<b>Item</b>	Split duct, KKHR 110 und 125	
<b>Description</b>	Consists of 2 half shells, for pressure tight repair damages in cable ducts in combination with KKHRM.	
<b>Optional</b>	To install the split ducts, it is necessary to use the according assembly tool.	
<b>Package unit</b>	KKHR Ø 110mm x 2000mm:	3 pieces / unit; 78 pieces / pallet
	KKHR Ø 110mm x 6000mm:	3 pieces / unit; 78 pieces / pallet
	KKHR Ø 125mm x 3000mm:	4 pieces / unit; 52 pieces / pallet
	KKHR Ø 125mm x 6000mm:	4 pieces / unit; 52 pieces / pallet
<b>Production length</b>	KKHR 110:	2000 / 6000 mm
	KKHR 125:	3000 / 6000 mm

### Technical data

Quality	Value	Unit
<b>Material</b>	PolyVinylChlorid - Unplastinized PVC-U	
<b>Dimension</b>	$d = 110,0^{+0,3}; s = 3,2^{+0,5}$	mm
	$d = 125,0^{+0,3}; s = 3,7^{+0,6}$	
<b>Pressure</b>	0,5 (permanent gas- and watertight)	bar
	mastic (enclosed at the sleeves) is to use according installation instruction	

**gabocom is certified by the quality system following DIN EN ISO 9001:2008**

gabo Systemtechnik GmbH  
 Am Schaidweg 7  
 94559 Niederwinkling  
 Germany

Phone 0049 (0)9962 950 200  
 Fax 0049 (0)9962 950 202  
 info@gabocom.de  
 www.gabocom.de

Editor: PW  
 Release: MK  
 Edition: 15.11.2011

No responsibility is taken for the correctness, currency and completeness of details and information.  
 Liability for damages is excluded.