

MiniFlex™ Indoor Microduct



MiniFlex™ Indoor Microduct is a microduct for the routing of cables and optical fibers within buildings.

MiniFlex™ Indoor Microduct is made from a flame retardant, Low Smoke Zero Halogen polymer making it suitable for use indoors in the event of fire (EU only).

MiniFlex™ Indoor Microduct has a low-friction & low static DVC™ lining to assist in pulling, blowing and pushing of fiber or cable.



Advantages

- Fire retardant
- Low smoke, zero halogen (LSZH)
- Features MiniFlex™ technology
- Ultra tough
- Ultra low friction & low static DVC™ lining aiding fiber install
- Very high crush resistance
- Class-leading push and blow ability
- Bend radius of 100mm

Compatibility List

MiniFlex™ Indoor Microduct is compatible with:

- QuikPush products
- Industry standard push-fit connectors
- Compatible with all microduct, fiber and cables

Applications

- FTTh/FTTx - Indoor
- Data Infrastructure
- Telecoms


Product Specifications			
Material	Property	Best for...	Color
PBT	Hardest & toughest outdoor material, some UV resistance	All general applications	BLK, WHT
PA12	(Nylon) Hardest & toughest indoor material, European LSZH	Frequently accessed ODFs needing extra protection	WHT
MDPE	Standard cable jacket material	Aerial	BLK
HDPE	Harder & denser than MDPE	Direct bury	ORG
PVDF	Used for indoor & outdoor applications. Meets US fire ratings (OFNR)	Indoor use especially building risers	WHT
PP	Basic most cost effective grade	Protecting fiber in cabinets	ALL
PEMX	Specialized LSZH & riser material	Indoor use especially building risers	WHT, BLK

• ISO9001 Production, REACH, ROHS, Certificate of Origin, EN 50411-6-1, IEC 60794-5

MiniFlex™ Indoor Microduct



Enquiry Information: Code Builder

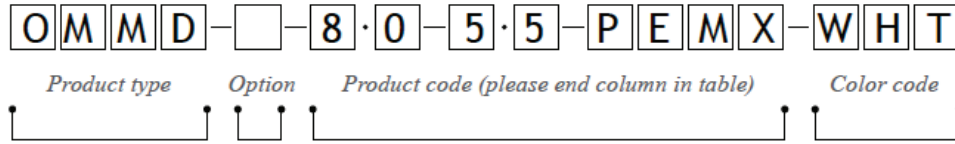

Product Type

OMMD = Optical Fiber Miniflex™ Microduct

Option

P = Pullcord

Unique Product Code

e.g. 8.0-5.5-PEMX
(end column)

Color Code

(check availability)

BLK = Black

WHT = White

Pre-fibered Drop Duct Product List

Material	OD (mm)	ID (mm)	Crush (n)	Tension (n)	Nominal Weight (kg/km)	Bend Radius (Passive)	Bend Radius (Active)	Install Temp (Celsius)	Product Code
PEMX	8.0	5.5	400	250	24.3	10x OD	5x OD	-10 to +60	8.0-5.5-PEMX
	10	6.0	725	350	39.6	10x OD	5x OD	-10 to +60	1.0-6.0-PEMX

Environmental Conditions:

Operating
Temperature:
-40°C / +70°C

Pullcord

A pull cord can be specified to enable easy population of the protection tube if required

Contact

World Headquarters: 6176 E. Molloy Rd. East Syracuse, NY 13057 U.S.A.
Email: customerservice@ppc-online.com Tel: +1 315-431-7200 Toll Free: 1-800-800-6652