


# Cable Proposal CP4259



06-March-2020 Version 0 Page 1 of 1

## 14/10MM PRIMARY TUBE RIBBED BLACK

*Microduct, sheath and any stripe colour for illustration only, to be defined at product set up*

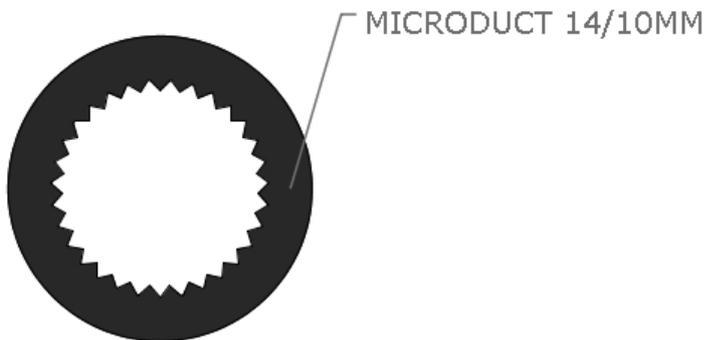

### PRODUCT OVERVIEW

#### Application

This product is designed for use within protected microduct designs and as a stand alone microduct, capable of direct burial into suitably prepared ground.

#### Overall

Product Diameter	14mm
Product Weight	71.9g/m
Metal Free	Yes
Minimum Bend Radius <small>(Note 4)</small>	13D
Maximum Tensile Load	650N

#### Microduct

14/10mm, HDPE carbon black, low friction liner, ribbed Black

#### Additional Information

Carbon Black additive allows for 25 year UV life span.

*Note 1: Diameters and thicknesses are measured to nearest 0.1mm.*

*Note 2: All dimensions and weight are 'nominal'.*

*Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.*

*Note 4: 'D' is the appropriate product diameter for the bending direction.*