

LED Wall Plate Dimmer

100W, IP20





PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Polycarbonate housing
- Large screw terminals
- Fits standard 41mm depth back box

FEATURES

- Compatible with most of ROBUS dimmable luminaires (compatibility list available on the website)
- Programmable minimum light level (see Instruction Manual for details)
- Push on/off operation with soft start
- Equipped with overload protection for enhanced security
- Suitable for one and two way switching



WARRANTY

LIFETIME

IP RATING

OPERATING VOLTAGE


SAFETY CLASS

DIMMING


RLA250DTG-01	
Maximum LED Load (W):	100
Minimum LED Load (W):	5
Maximum resistive load (W):	150
IP:	20
Operation Temperature (°C):	-10 ≤ Ta ≤ +40
Dimensions LxWxH	86x86x44
Weight (kg):	0.11

Product is certified to all the relevant standards.


Please contact our technical department for market specific compliances.

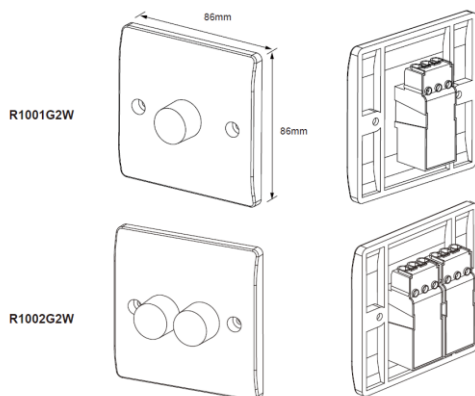

Wiring: TWO WAY DIMMER CIRCUIT



ONE WAY DIMMER CIRCUIT



PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA