


HUMAN CENTRIC LIGHTING

ROBUS®

30W Zigbee Controlled Tunable White HCL Panel, 2700-6500K, 600*600mm, UGR<19

Product Code:	RHZSP306060-01
Comparable to:	4x18W T8
Total Power (W):	30.0-30.3
Total Light Output (lm):	3,150-3,400
Efficacy (lm / cctW):	104-113
Illuminance at 1m (lux):	1,480-1,600
Beam Angle (deg):	90
CCT (K):	2,700-6,500
CRI (Ra):	85
Rated Life (hrs):	50,000
Warranty (yrs):	5
Ingress Protection (IP):	20
Operating Temperature (°C):	-20 ≤ Ta ≤ +40
Driver Output Current CC (mA):	750
Driver Output Voltage @ CC (VDC):	35
Operating Voltage (Vac):	220-240
Power Factor (PF):	0.9
Height (mm):	9
Length (mm):	595
Width (mm):	595
Box Qty:	1
Weight (kg):	2.5

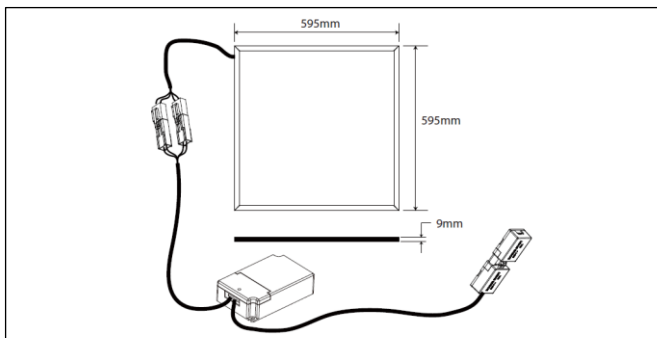

Accessories:

- R3EMPK4-PSU Emergency Pack
- RHZMMEN-01 MODUM Zigbee scene controller

Standards & Approvals:

Complies with: EN 60598-2-1, EN 60598-2-2, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547, EN 62471, EN 62493, EN 62384

Cone Illuminance Diagram:


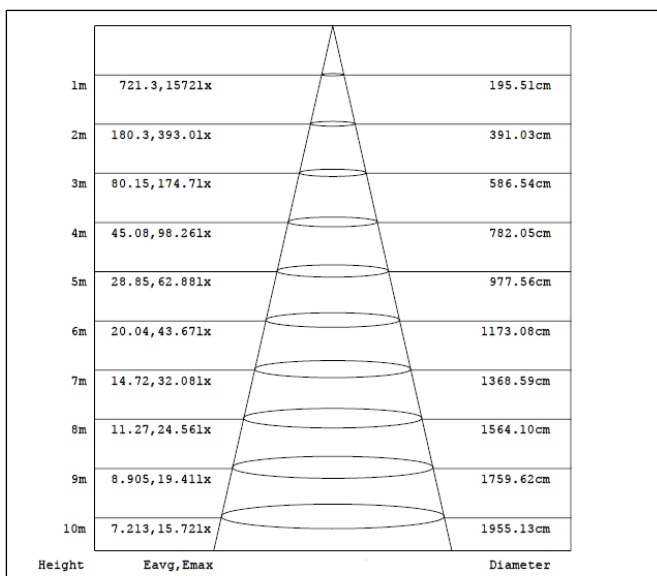


Diagram for RHZSP306060-01 in 4,000K. Other diagrams available on request



Polar Intensity Diagram:

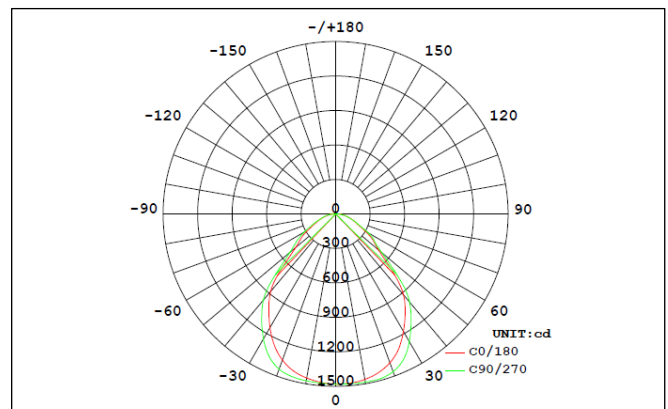


Diagram for RHZSP306060-01 in 4,000K. Other diagrams available on request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 AUS: TEL: +61 7 3890 5444

WEB: WWW.ROBUS.COM
 WEB: WWW.ROBUS.COM.AU

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA