ROBUS®

COSMIC 90W LED FLOOD LIGHT IP65, BLACK, 3000K/4000K, ASYMMETRIC

RCM9030AS-04 RCM9040AS-04

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES. ! Electrical products can cause death or injury, or damage to property. The Installation must be carried out by a qualified electrician.

Note:

The luminaire must be disconnected before carrying out any insulation resistance testing. Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site www.robus.com.au and www.robusled.co.nz


-20°C < Ta < +40°C, 220-240V \sim 50/60Hz, Class I, IP65 Luminaire is non-dimmable


Installation


- 1. Ensure mains supply is switched off before commencing work.
- 2. Select suitable location for luminaire.
- Mark wall with appropriate fixing positions. Before drilling, ensure that the hole does not impinge on pipe work, cables or other building services.
- 4. Attach luminaire and fix bracket by tighten screws, then adjust to desired angle. Ensure that it is secure.
- The luminaire is supplied with 1m of rubber cable. Using suitable IP rated enclosure terminate Brown (Live), Blue (Neutral) and Green/Yellow (Earth) to switch supply.
- This product has no user serviceable parts. If any part is damaged, disconnect from mains and discontinue use.


Note: No "fixings screws provided", please use appropriate fixing screws.


Projection Distance: 7.5m Max Width: 14 -17m Mounting Height: 5.5m - 8m




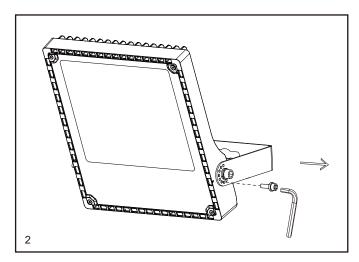











Suite B, 2 Pittwin Road Capalaba Queensland 4157

Tel: 07 3890 5444 Fax: 07 3890 4777 Email: purchases@robus.com Website: www.robus.com.au

Australia
LED Group

Crowe Horwath Tel: +64 3668 5285
72 Trafalgar Street Email: nz purchases@robus.com

NELSON 7010 Website: www.robusled.co.nz New Zealand





the operating light source