## **ROBUS**°

## COSMIC 300W LED FLOOD LIGHT, IP65, BLACK, 4000K

### RCM30040-04

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES. ! Electrical products can cause death or injury, or damage to property. The Installation must be carried out by a qualified electrician.

#### Note:

The luminaire must be disconnected before carrying out any insulation resistance testing. Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site www.robus.com.au and www.robusled.co.nz

 $-20^{\circ}$ C < Ta <  $+40^{\circ}$ C, 220-240V ~ 50/60Hz, Class I, IP65 Luminaire is non-dimmable

#### Installation

- 1. Ensure mains supply is switched off before commencing work.
- 2. Select suitable location for luminaire.
- Mark wall with appropriate fixing positions. Before drilling, ensure that the hole does not impinge on pipe work, cables or other building services.
- 4. Attach luminaire and fix bracket by tighten screws, then adjust to desired angle. Ensure that it is secure.
- The luminaire is supplied with 1m of rubber cable. Using suitable IP rated enclosure terminate Brown (Live), Blue (Neutral) and Green/Yellow (Earth) to switch supply.
- This product has no user serviceable parts. If any part is damaged, disconnect from mains and discontinue use.

Note: No "fixings screws provided', please use appropriate fixing screws.

Projection Distance:	17.5m
Max Projection Area:	33m
Mounting Height:	12.5-18m

#### The Installation must be carried out by a qualified electrician

LED Group Australia Pty Limited

Suite B, 2 Pittwin Road Tel: 07 3890 5444 Capalaba Fax: 07 3890 4777

Queensland 4157 Email: purchases@robus.com Australia Website: www.robus.com.au

LED Group


Crowe Horwath Tel: +64 3668 5285


72 Trafalgar Street Email: nz\_purchases@robus.com NELSON 7010 Website: www.robusled.co.nz New Zealand





Warning: Do not stare at the operating light source




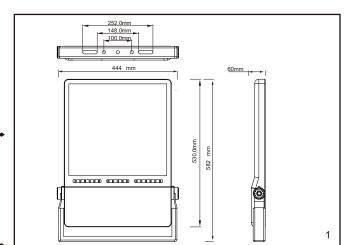









# **ROBUS**°

### COSMIC 300W LED FLOOD LIGHT, SPIGOT ACCESSORY, BLACK

### RCMS-04


PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.


! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site www.robus.com.au or robusled.co.nz


### Installation


- Select suitable location for luminaire. Ensure spigot is Ø50-60mm in diameter
- 2. Fix the spigot accessory onto the bracket as per figure 2. Adjust to desired angle. Ensure it is secure
- 3. Attach luminaire with accessory onto the Ø50-60mm spigot and tighten screws as per figure 3 or 4.
- 4. Adjust the Luminaire to desired angle and then tighten bolts as per figure 5. Ensure that it is secure.

















Suite B, 2 Pittwin Road
Capalaba
Queensland 4157
Australia

Suite B, 2 Pittwin Road
Fax: 07 3890 5444
Fax: 07 3890 4777
Email: purchases@robus.com
Australia
Website: www.robus.com.au

LED Group

Crowe Horwath Tel: +64 3668 5285

72 Trafalgar Street Email: nz\_purchases@robus.com NELSON 7010 Website: www.robusled.co.nz

New Zealand

