


ROBUS®

DOWNLIGHTS

CAPELLA GU10 Fire Rated Downlight IP20/65

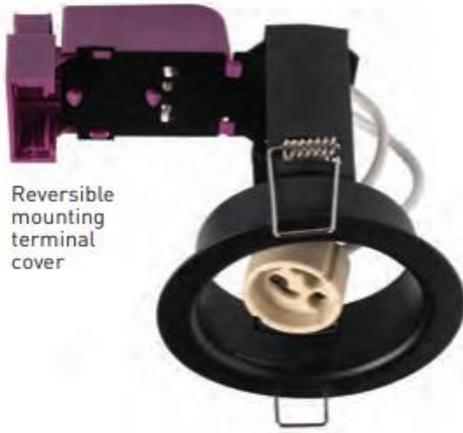

PRODUCT INFORMATION DOCUMENT

FEATURES

- Modern open back design for improved lamp cooling and performance
- Universal can size across all bezel types for stock saving and retro fit change flexibility
- Quick fit loop-in, loop-out push in terminals and cable clamp
- Tested for use with I-Joists & Metal Web Joists

CONSTRUCTION

- Steel body and glass lens with intumescent seal providing security of passive and active fire barrier protection
- 30 and 60-minute certified GU10 lamp holder and fire rated downlight in IP65/20 fixed and IP20 directional versions
- Reversible terminal block cover assembly to accommodate low profile ceilings
- Compliant to Building Regulations Part B, C & E



WARRANTY



FIRED RATED



LUMENS PER W



IK 02



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



DIMMING



CCT




SAFETY CLASS

	RCPF10
Comparable to:	50W halogen
Total Power (W):	xxx
Total Light Output (lm):	xxx
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	xxx
IP:	20/65
Operation Temperature (°C)	-20 ≤ Ta ≤ +40
Lux at 1m (lux):	xxx
Emergency Lux at 1m (lux):	NA
Inrush Current:	xxx
CCT (K):	xxx
RG Value:	xxx
Rated Life to L70B50 (Hrs):	xxx
Dimensions ØxH (mm):	90x114
Cut Out (mm):	73-78
Weight (kg):	0.13

xxx – Actual performance depends on the lamp used

ACCESSORIES:

RCPF10	Insulation Guard
RCPFB20S-01/03/13	IP20 Bezel, Straight
RCPFB65S-01/03/13	IP65 Bezel, Straight
-01	White
-03	Chrome
-13	Brushed Chrome

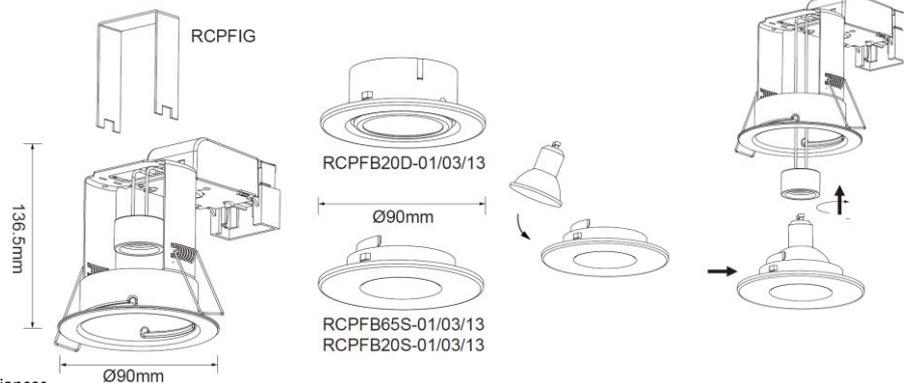

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA