

ROBUS®

INDUSTRIAL

HARBOUR V2

10W, 20W, 28W, 34W, 40W, 58W, 70W, 80W, IP65, 2ft, 4ft, 5ft, 6ft






PRODUCT INFORMATION DOCUMENT

FEATURES

- Suitable for workshops, garages, warehouses, car parks, farm buildings, wet areas
- Flexible so will not crack when mounted on uneven surfaces
- Provides excellent light uniformity with less glare
- Less susceptible to failure due to building vibration caused by traffic or hot/cold temperature variations
- Provides ingress protection against dust and water jets

CONSTRUCTION

- Grey coloured polycarbonate body
- Opal polycarbonate diffuser
- Stainless steel clips
- Aluminium gear tray



Product Code:	RHA10402FTV2-24	RHA20402FTV2-24	RHA20404FTV2-24	RHA40404FTV2-24
4000K	RHA10502FTV2-24	RHA20502FTV2-24	RHA20504FTV2-24	RHA40504FTV2-24
Comparable to:	1 x 18W T8	2 x 18W T8	1 x 36W T8	2 x 36W T8
Total Power (W):	9.8/ 9.9	20.2/ 20.0	19.9/ 19.9	38.8/ 39.3
Power Factor:	0.9	0.97	0.97	0.95
Beam Angle (Deg):	150	130	150	130
Total Light Output (lm):	1230/ 1220	2510/ 2450	2460/ 2450	4860/ 4720
Total Emergency Light Output (lm):	270/ 280	270/ 270	270/ 270	270/ 270
Efficacy (lm/cctW):	126/ 124	124/ 121	124/ 123	125/ 120
Lux at 1m (lux):	300/ 300	710/ 680	630/ 620	1430/ 1380
Emergency Lux at 1m (lux):	60/ 60	60/ 60	60/ 60	50/ 50
CCT (K):	4000/ 5000	4000/ 5000	4000/ 5000	4000/ 5000
CRI:	80	80	80	80
IP:	65	65	65	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	1.4A/5us	0.2A/5us	3A/0.1us	4.3A/0.2us
RG Value:	0	0	0	0
SDCM:	6	6	6	6
P _{st} LM:	NA	NA	NA	NA
SVM:	NA	NA	NA	NA
Energy Class:	D	D	D	D
Rated Life to L70B50 (Hrs):	50000	50000	50000	50000
Dimensions LxWxH (mm):	650x72x70	650x117x70	1250x72x70	1250x117x70
Weight (kg):	0.68	0.92	1.14	1.62

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

ROBUS®

INDUSTRIAL

HARBOUR V2

10W, 20W, 28W, 34W, 40W, 58W, 70W,
80W, IP65, 2ft, 4ft, 5ft, 6ft

Product Code:	RHA28405FTV2-24	RHA58405FTV2-24	RHA80405FTV2-24	RHA34406FTV2-24	RHA70406FTV2-24
4000K	RHA28405FTV2-24	RHA58405FTV2-24	RHA80405FTV2-24	RHA34406FTV2-24	RHA70406FTV2-24
5000K	RHA28505FTV2-24	RHA58505FTV2-24	RHA80505FTV2-24	RHA34506FTV2-24	RHA70506FTV2-24
Comparable to:	1 x 58W T8	2 x 58W T8	2 x 70W T8	1 x 70W T8	2 x 70W T8
Total Power (W):	27.5/ 27.4	55.7/ 56.0	80.1/ 80.3	33.3/ 32.3	68.3/ 68.1
Power Factor:	0.95	0.95	0.97	0.95	0.95
Beam Angle (Deg):	150	120	130	150	130
Total Light Output (lm):	3360/ 3310	6840/ 6780	9150/ 9480	3990/ 3820	8300/ 8210
Total Emergency Light Output (lm):	270/ 270	270/ 270	270/ 270	270/ 270	270/ 270
Efficacy (lm/cctW):	122/ 121	123/ 121	114/ 118	120/ 118	122/ 121
Lux at 1m (lux):	880/ 860	2070/ 2050	2780/ 2880	940/ 890	2270/ 2240
Emergency Lux at 1m (lux):	50/ 50	50/ 50	50/ 50	50/ 50	50/ 50
CCT (K):	4000/ 5000	4000/ 5000	4000/ 5000	4000/ 5000	4000/ 5000
CRI:	80	80	80	80	80
IP:	65	65	65	65	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	13A/12us	30A/20us	55A/3us	6A/0.7us	3.6A/0.5us
RG Value:	0	0	0	0	0
SDCM:	6	6	6	6	6
P _{ST} LM:	NA	NA	NA	NA	NA
SVM:	NA	NA	NA	NA	NA
Energy Class:	D	D	D	D	D
Rated Life to L70B50 (Hrs):	50000	50000	50000	50000	50000
Dimensions LxWxH (mm):	1550x72x70	1550x117x70	1550x117x70	1850x72x70	1850x117x7
Weight (kg):	1.44	1.98	1.98	1.83	2.58

Separate Control Gear Information	RHA10402FTV2-24 RHA10502FTV2-24	RHA20402FTV2-24 RHA20502FTV2-24	RHA20404FTV2-24 RHA20504FTV2-24	RHA40404FTV2-24 RHA40504FTV2-24
Type of Light Source:	LED	LED	LED	LED
Full Load Efficiency (%):	93	90	91	92
P _{NET} (W):	NA	NA	NA	NA
Dimensions (mm):	144x21x22	144x21x22	144x21x22	148x34x26

Separate Control Gear Information	RHA28405FTV2-24 RHA28505FTV2-24	RHA58405FTV2-24 RHA58505FTV2-24	RHA80405FTV2-24 RHA80505FTV2-24	RHA34406FTV2-24 RHA34506FTV2-24	RHA70406FTV2-24 RHA70506FTV2-24
Type of Light Source:	LED	LED	LED	LED	LED
Full Load Efficiency (%):	92	93	93	92	94
P _{NET} (W):	NA	NA	NA	NA	NA
Dimensions (mm):	144x21x22	192x40x26	192x40x26	148x34x26	192x40x26

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

ROBUS®

INDUSTRIAL

HARBOUR V2

10W, 20W, 28W, 34W, 40W, 58W, 70W,
80W, IP65, 2ft, 4ft, 5ft, 6ft

Cone Illuminance Diagram

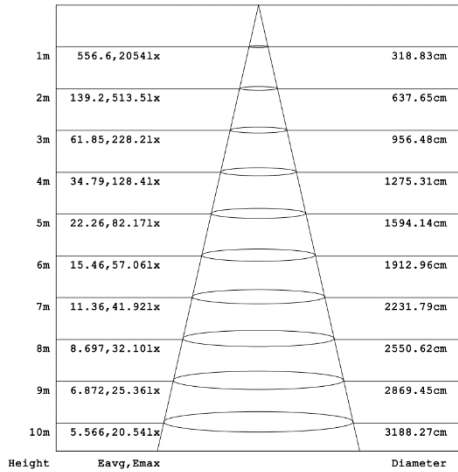


Diagram for RHA58505FTV2-24 in 5000K. Other diagrams available on request

Polar Intensity Diagram


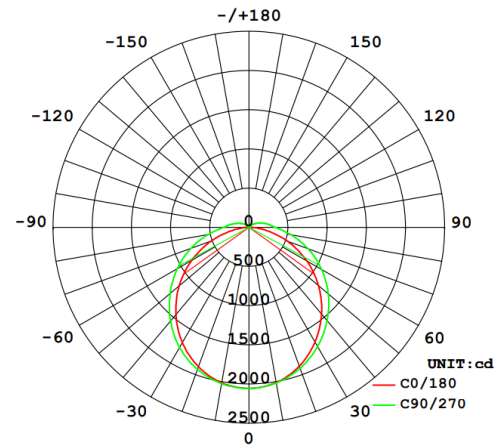


Diagram for RHA58505FTV2-24 in 5000K. Other diagrams available on request

Dimension Diagram

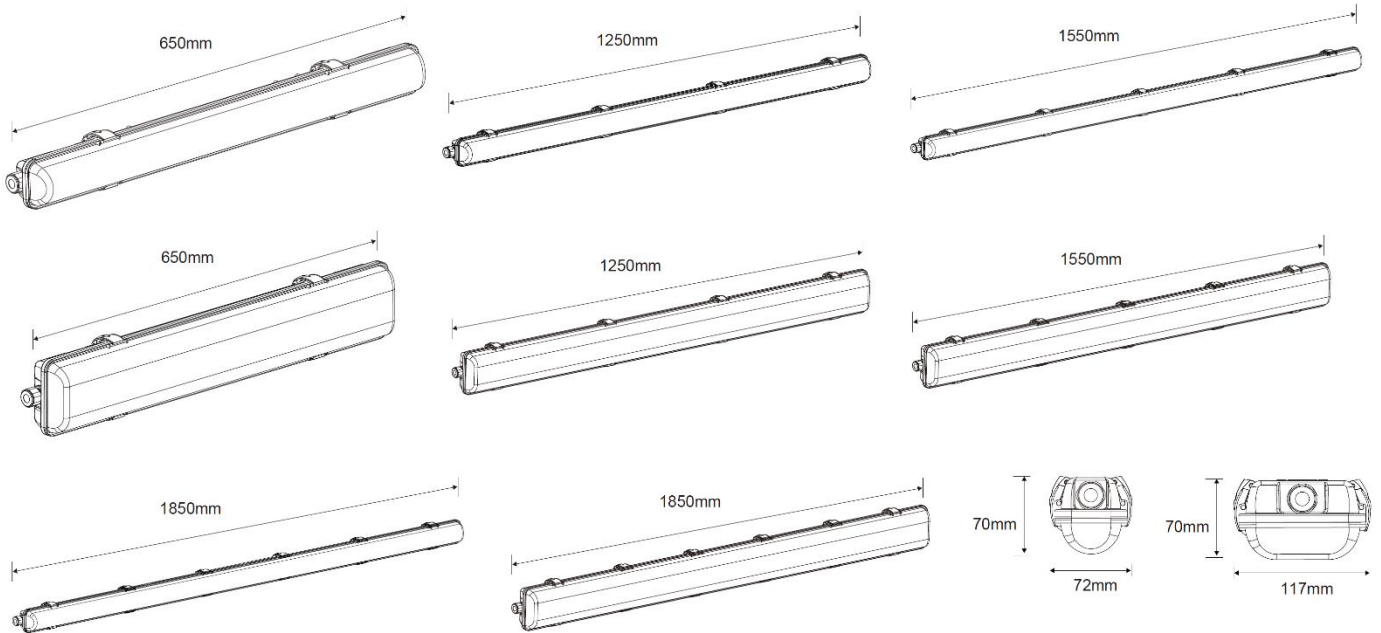

Accessories

RLEMPKDT-PSU
RLMW

2W 3 Hour DUAL TEST Emergency Pack
Plug-in Microwave Sensor

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.US.LED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA