

ROBUS®

HUMANITAS

GRANADA HUMANITAS LED Downlight, UGR <19

30W, IP20



PRODUCT INFORMATION DOCUMENT

FEATURES

- Part of ROBUS Human Centric Lighting range allowing control of Illuminance and Melanopic Light throughout the Day
- UGR<19 complies with the requirements of EN12464 for reading, writing and computer based tasks in offices and other areas
- Complete with Zigbee wireless flicker-suppressed driver
-

CONSTRUCTION

- Aluminium housing with polycarbonate diffuser
- Stainless steel spring clips
- Prewired with 0.6m flex and ROBUS SWIFT connector



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



IK RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



DIMMING



CCT





SAFETY CLASS

	RHZGA30
Comparable to:	2x26W PL
Total Power (W):	29.0-30.3
Total Light Output (lm):	2630-2960
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	87-102
IP:	20
Operation Temperature (°C)	-20 ≤ Ta ≤ +40
Lux at 1m (lux):	2490-2790
Emergency Lux at 1m (lux):	NA
Inrush Current:	22.4A/66us
CCT (K):	2700-6500
RG Value:	0
Rated Life to L70B50 (Hrs):	>54000
Dimensions LxWxH	232x113
Weight (kg):	0.7

ACCESSORIES:

RHZMMEN-01 MODUM Humanitas Zigbee Controller

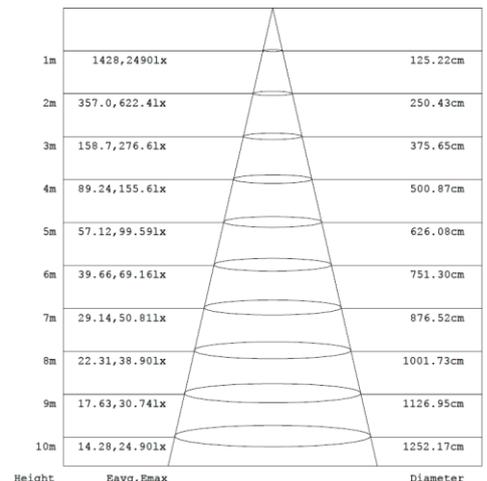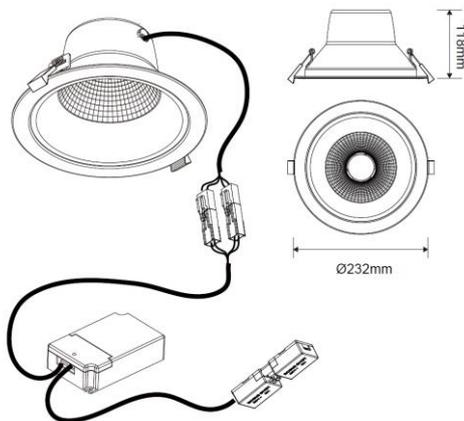

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Diagram for RHZGA30 in 2700K. Other diagrams available on request

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA