

ROBUS®

FLEXI-STRIPS

MACAU

14W, IP20, IP67



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Flexible COB LED with 3M adhesive tape
- Silicone covered IP67 version
- Comes on 20m reel

FEATURES

- Very high CRI > 90 making it ideal in applications requiring accurate colour reproduction
- COB technology providing smooth, continuous light effect
- Indoor and outdoor versions which can be cut every 45mm
- Available range of dimmable and non-dimmable drivers between 15W and 320W
- Remote, wall mounted and CONNECT controllers
- Easy clip connector packs available



WARRANTY



LIFETIME



LUMENS PER W



IP RATING



CCT



BEAM ANGLE



DIMMING



OPERATING VOLTAGE



SAFETY CLASS



MAX 5M



4.5CM

	RMU1420-30	RMU1420-40	RMU1467-30	RMU1467-40
Comparable to:	NA	NA	NA	NA
Total Power (W/m):	14.7	14.1	15.5	15.2
Total Light Output (lm):	1,310	1,460	1,170	1,350
Efficacy (lm/cctW):	89	104	76	89
Lux at 1m (lux):	330	360	270	310
CCT (K):	3000	4000	3000	4000
CRI:	90	90	90	90
IP:	20	20	67	67
Operation Temperature (°C):	-20 ≤ Ta ≤ +40			
RG Value:	0	0	0	0
Dimensions LxWxH	1000x10x1	1000x10x1	1000x10x4	1000x10x4
Weight (kg):	0.01	0.01	0.08	0.08

Connector Packs:

RMU-C	IP20/STRIP-TO-STRIP, WITHOUT WIRES
RMU-C1	IP20/STRIP-TO-DRIVER, WITH 150MM WIRES
RMU-C2	IP20/STRIP-TO-STRIP, WITH 150MM WIRES
RMU67-C	IP67/STRIP-TO-STRIP, WITHOUT WIRES
RMU67-C	IP67/STRIP-TO-DRIVER, WITH 150MM WIRES
RMU67-C	IP67/STRIP-TO-STRIP, WITH 150MM WIRES

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

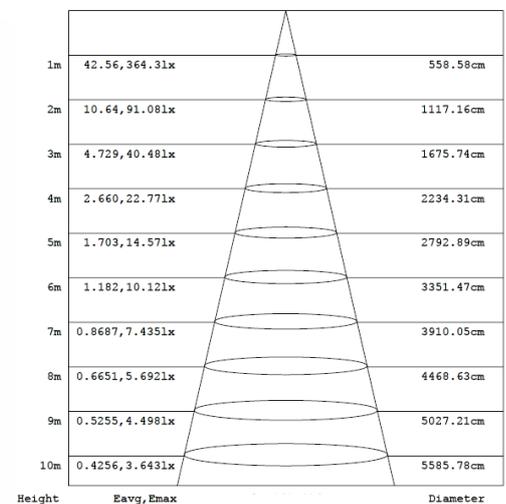


Diagram for RMU1420-40. Other diagrams available on request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +050 8 533 335

WEB: WWW.ROBUS.COM
 WEB: WWW.ROBUS.COM
 WEB: WWW.ROBUS.COM.AU
 WEB: WWW.NZ_PURCHASES@ROBUS.COM

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA