

ROBUS®

OUTDOOR

MAXWELL UP/DOWN WALL LIGHT 10W, IP65



PRODUCT INFORMATION DOCUMENT

FEATURES

- Suitable for use in walkways in domestic, hotel, pub & restaurant applications, terrace, patios
- Up and down lights equipped with barn door louvers allowing to shape and direct stream of light as desired
- High quality UV-stabilized powder coating finish
- Available in black and grey

CONSTRUCTION

- Fully aluminium housing
- Polycarbonate diffuser
- Stainless steel screws



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



IK RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



DIMMING



CCT



SAFETY CLASS

Product Code:	Grey Black	RMX1030-25 RMX1030-04
Comparable to:		50W halogen
Total Power (W):		9.1
Power Factor:		0.9
Total Light Output (lm):		680
Total Emergency Light Output (lm):		NA
Efficacy (lm/cctW):		75
Lux at 1m (lux):		180
Emergency Lux at 1m (lux):		NA
CCT (K):		3000
CRI:		80
IP:		65
Operation Temperature (°C):		-20 ≤ Ta ≤ +40
Inrush Current:		7.4A/0.06µs
RG Value:		0
SDCM:		6
Energy Class:		D
Rated Life to L70B50 (Hrs):		30000
Dimensions LxWxH (mm):		100x100x120
Weight (kg):		0.57

Separate Control Gear Information

Type of Light Source:	LED
Full Load Efficiency (%):	89
P _{NET} (W):	8.7
Dimensions (mm):	41x24x16

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

MAXWELL UP/DOWN WALL LIGHT

10W, IP65

Cone Illuminance Diagram

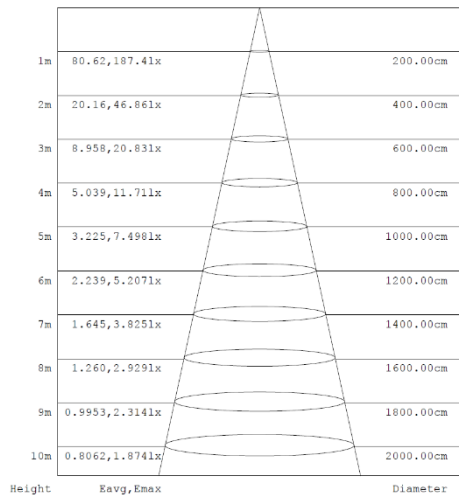


Diagram for RMX1030-25 in 3000K. Other diagrams available on request

Polar Intensity Diagram


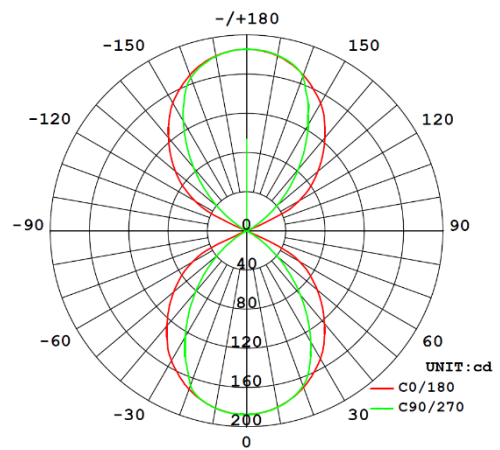


Diagram for RMX1030-25 in 3000K. Other diagrams available on request

Dimension Diagram

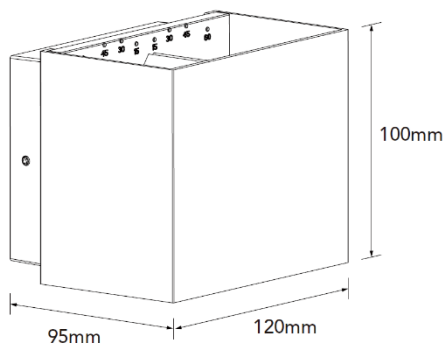

Accessories

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA