

ROBUS®

OUTDOOR

MONOLUX E27 BOLLARD

20W Max, IP54



PRODUCT INFORMATION DOCUMENT

FEATURES

- Suitable for use in domestic and commercial outdoor applications as pathway and garden lighting
- Complete with E27 lampholder and suitable to use with LED lamps up to 20W
- Lumen output, beam angle, CCT and other parameters depending on lamps used
- High quality powder coating process for high corrosion resistance
- Prewired with 1m of rubber flex
- Suitable for switching by PIR, Microwave or Photocell sensors

CONSTRUCTION

- Die cast aluminium housing with polycarbonate opal diffuser
- Ceramic E27 lamp holder
- Stainless steel screws



WARRANTY



LIFETIME



LUMENS PER W



IK RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



DIMMING




CCT



SAFETY CLASS

Product Code:	RMX65E-25
Comparable to:	NA
Total Power (W):	20W Max
Power Factor:	NA
Total Light Output (lm):	NA
Efficacy (lm/cctW):	NA
Lux at 1m (lux):	NA
CCT (K):	NA
CRI:	NA
IP:	44
Operation Temperature (°C):	-20 ≤ Ta ≤ +45
Energy Class:	NA
Rated Life to L70B50 (Hrs):	NA
Dimensions LxWxH (mm):	108x108x650
Weight (kg):	2.25

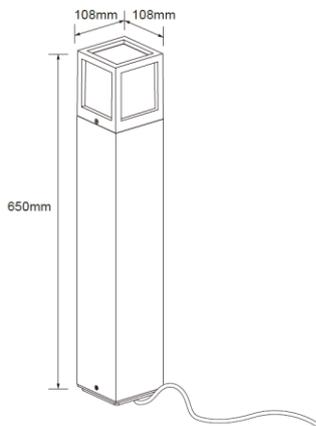

Product is certified to all the relevant standards.
Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA