LIGHTING CONTROLS

ROBUS®

PROTON 360° & 180° RECESSED & SURFACE MOUNT PIR'S, MANUAL OVERRIDE

This superb range of 180[°] IP54 and 360[°] IP20 Passive Infra-Red detectors are designed using the latest electronic integrated chips to provide reliable, accurate detection to ensure that lighting is switched on only when required, but more importantly, switched off when the area is vacated to make much sought after energy savings



Applications:

- Commercial offices
- Corridors & Stairways
- Workshops & Garages & Sheds
- Kitchens
- Basements. Back of house and Storage areas
- Toilets & Cloakrooms
- Apartment communal areas
- Gallery or museum displays
- Gardens, Patios & Decking areas
- Parking areas, Driveways, Paths & Walkways
- Loading bays
- Corner mounting in larger rooms

Construction:

Polycarbonate Sensor Body Self-coloured White or Black

Features:	Benefits:		
 White polycarbonate IP20 360° White or black IP54 180° PIR's 	 Strong and durable material that won't discolour over time Full range of recessed or wall mounted PIR's for indoor and outdoor use Choice of finish colour of 180⁰ version to match building Infra-red provides reliable detection with less false switching 		
 Flush mounting sensor has cuttable shield included Optional corner mounting bracket for white180⁰ sensor Horizontal and vertical adjustable multi-position 180⁰ sensor 	 Allows bespoke asymmetric detection area to be set Increased mounting versatility for internal or external corners Sensor can be aimed to only detect a specific area Remedies nuisance switching by neighbours or passers-by 		
High quality sensor head and lens ensures detection of occupancy and motion in respective areas	 Ensures lighting is switched and remains on when needed Suitable for detection of movement in offices, corridors or out- doors 		
Easily accessible time and lux potentiometers	Allows for fast and simple set-up		
Adjustable delay-off time and lux switching level	 Quick setup with 10 second walk test Guaranteed energy saving by switching off after delay Saves on energy costs by inhibiting the lighting switching on when it is light enough 		
Manual over-ride with automatic reset	 Allows manual over-ride-on for up to 8 hours before resetting Manual over-ride can be cancelled at any time to continue energy saving 		
Excellent LED load rating	 Able to switch up to 30 x 10W LED downlights or 9 x 32W LED panels 		
No minimum load requirements	A single low wattage fitting can be switched if required		
Earth terminal included	Provides earth continuity for the circuit		
Large terminals suitable for 2 conductors in each	• L _s , N, & E conductors can be taken to light fitting without using a JB		
• 5-year warranty	 A quality, energy saving, long life product with no warranty form filling or internet registration required 		



PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE TEL: +353 1 709 9000 WEB: WWW.LEDGROUPROBUS.COM TEL: +61 7 3890 5444 WEB: WWW.LEDGROUPROBUS.COM.AU

IRE:


AUS:


LIGHTING CONTROLS

ROBUS®

PROTON 360° & 180° RECESSED & SURFACE MOUNT PIR'S, MANUAL OVERRIDE

Product Codes:	White:	RPR180PIR-01	RPR360PIRR-01
	Black:	RPR180PIR-04	N/A
Maximum Load Incandescent/fluorescent/LED (W	/):	1200/300/300	800/400/400
MIN/MAX Mounting Height (m):		1.8/2.5	2.2/2.8
Detection zone diameter @ Min/Max mounting he	ight (m):	12	6
Detection Angle (deg):		180	360
Manual Over-ride Time (min):		480	480
Hold Time Range (min):		10s/15min	10s/15min
Lux Switching Level Range (lx):		3-2000	3-2000
Warranty (yrs):		5	5
Ingress Protection (IP):		54	20
Ambient Operating Temperature (°C):		-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Operating Voltage (Vac):		220-240	220-240
Length (mm):		118	NA
Width (mm):		80	NA
Height (mm):		51	NA
Depth (mm):		NA	79
Diameter (mm):		NA	80
Cut Out (mm):		NA	66
Box Qty:		1	1
Weight (kg):		0.16	0.11

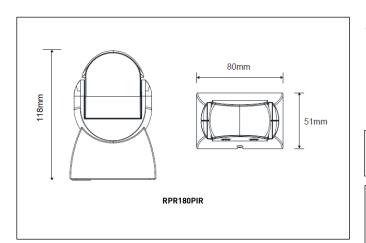

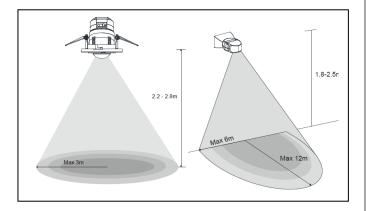


Accessories:

RPRBRK-01

CORNER MOUNT BRACKET FOR RPR180PIR-01

Standards & Approvals:

Complies with: AS/NZS 60669.1; AS/NZS 60669.2.1; SAA

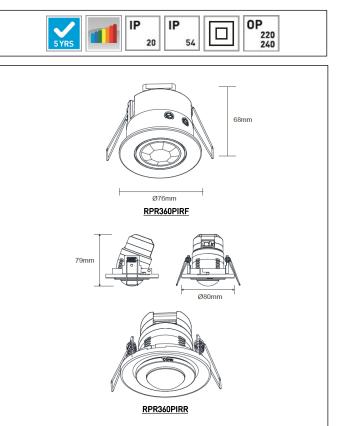



PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
 IRE:
 TEL: +353 1 709 9000
 WEB: WWW.LEDGROUPROBUS.COM

 AUS:
 TEL: +61 7 3890 5444
 WEB: WWW.LEDGROUPROBUS.COM.AU