

ROBUS®

OUTDOOR

TURNFINCH LED SPIKE LIGHT

5.5W, IP65



PRODUCT INFORMATION DOCUMENT

FEATURES

- Powder coated using electrophoresis process for high corrosion resistance
- Equipped with high quality Philips LED ensuring luminaire's reliability and high output
- Head adjustable angle of 300° horizontally and 180° vertically
- Suitable for switching by PIR, Microwave or Photocell sensors

CONSTRUCTION

- Die cast aluminium housing with glass diffuser
- FR-4 driver PCB
- Stainless steel screws
- Prewired with 1m rubber flex



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



IK RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



NON DIMMABLE DIMMING



CCT



SAFETY CLASS



ADJUSTMENT TILT

Product Code:	RTF0430-25
Comparable to:	50W halogen
Total Power (W):	5.5
Power Factor:	0.8
Total Light Output (lm):	440
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	80
Lux at 1m (lux):	1130
Emergency Lux at 1m (lux):	NA
CCT (K):	3000
CRI:	80
IP:	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +45
Inrush Current:	5A/2μs
RG Value:	0
SDCM:	6
Pst LM:	NA
SVM:	NA
Energy Class:	E
Rated Life to L70B50 (Hrs):	30000
Dimensions LxWxH (mm):	120x90x39.5
Weight (kg):	0.58
Separate Control Gear Information	
Type of Light Source:	LED
Full Load Efficiency (%):	79
P _{NET} (W):	NA
Dimensions (mm):	48x27x20

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

TURNFINCH LED SPIKE LIGHT

5.5W, IP65

Cone Illuminance Diagram


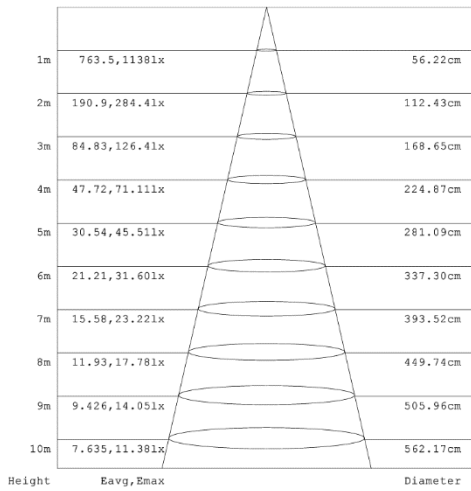


Diagram for RTF0430-25 in 3000K Other diagrams available on request

Dimension Diagram

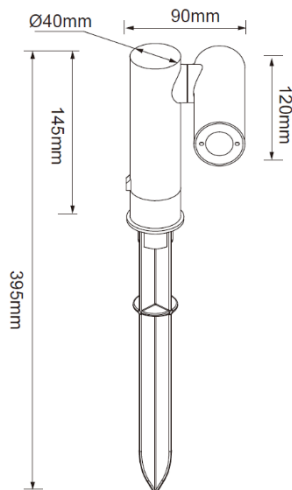

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

Polar Intensity Diagram

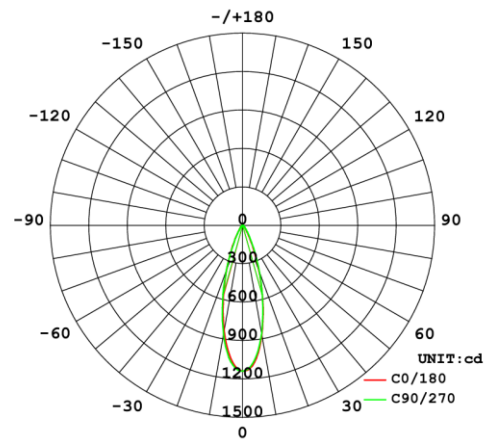


Diagram for RTF0430-25 in 3000K Other diagrams available on request

Accessories

NA