

ROBUS®

CONNECT

ULTIMUM CONNECT 7W, CCT2, IP65



PRODUCT INFORMATION DOCUMENT

IP65, Fire Rated Downlight that will make any living space look sleek and stylish at the touch of a button. The ROBUS ULTIMUM CONNECT 7W Downlight can be controlled via the ROBUS CONNECT App from anywhere in the world. You'll be able to set the colour temperature of each, a select few or all fittings from 2,700K to 6,500K depending on what atmosphere you want to create at any given time.



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



FIRED RATED



IP RATING



OPERATING VOLTAGE



CCT



BEAMANGLE



VOICE CONTROL



NO HUB REQUIRED



SAFETY CLASS

Product Code:	RUL070WIFI-01
Comparable to:	50W LV halogen
Total Power (W):	7.3-7.5
Power Factor:	0.9
Total Light Output (lm):	540-630
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	73-90
Lux at 1m (lux):	480-570
Emergency Lux at 1m (lux):	NA
CCT (K):	2700-6500
CRI:	80
IP:	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40
Inrush Current:	14A/3us
RG Value:	0
SDCM:	6
P _{ST} LM:	NA
SVM:	NA
Energy Class:	E
Rated Life to L70B50 (Hrs):	30000
Dimensions ØxH (mm):	60x85
Cut Out (mm):	72
Weight (kg):	0.28

Separate Control Gear Information	
Type of Light Source:	LED
Full Load Efficiency (%):	NA
P _{NET} (W):	NA
Dimensions (mm):	NA

Product is certified to all the relevant standards.
Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

ULTIMUM CONNECT

7W, CCT2, IP65

Cone Illuminance Diagram

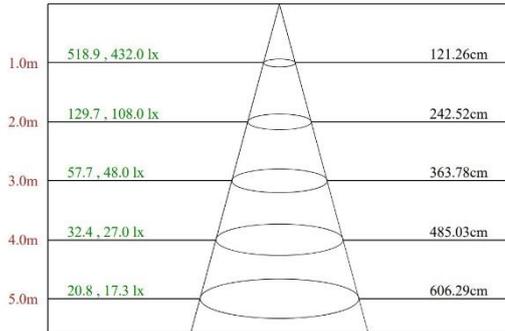


Diagram for RUL070WIFI-01 in 4000K. Other diagrams available on request

Polar Intensity Diagram


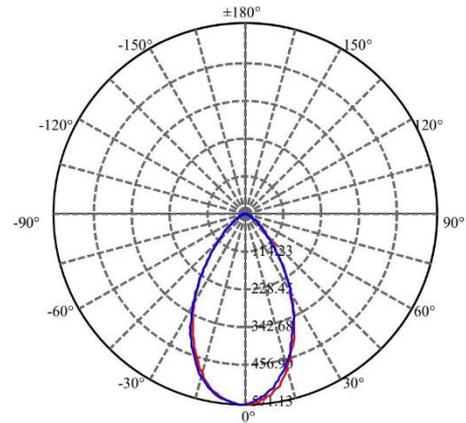


Diagram FOR RUL070WIFI-01 in 4000K. Other diagrams available on request

Dimension Diagram

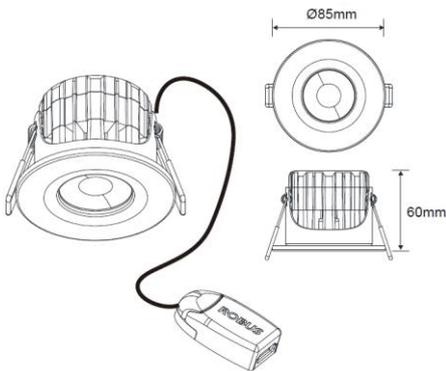

Accessories

- RULTRIM-03 ULTIMUM Polished Chrome Plastic Trim
- RULTRIM-10 ULTIMUM Matt Black Plastic Trim
- RULTRIM-13 ULTIMUM Brushed Chrome Plastic Trim

Sensor Data

Time Off Delay:	NA
Illuminance Switching Range:	NA
Sensitivity Range (%):	NA
Mounting Height (max):	NA
Detection Zone Diameter (max):	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA