

ROBUS®

FLEXI-STRIPS

VEGAS EVERYDAY

5W, IP20, IP65

IP20



IP65



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- FPC copper substrate PCB
- 1000mm 2x18AWG input wires

FEATURES

- Easy to install strips supplied in 5m or 10m lengths
- Very high CRI >90 making it ideal for applications requiring best colour reproduction
- 3000K, 4000K single colour options
- IP20 and IP65 versions for indoor and outdoor applications
- Can be cut every 10cm and reconnected as required.
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories



WARRANTY



LUMINAIRE LIFETIME



LUMENS PER W



IP RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



DIMMING



CCT



SAFETY CLASS

| Product Code: | RVE3K5 | RVE4K5 | RVE3K655 | RVE4K655 |
|------------------------------------|------------------|------------------|-----------------|-----------------|
| 5m | RVE3K10 | RVE4K10 | RVE3K6510 | RVE4K6510 |
| Comparable to: | NA | NA | NA | NA |
| Total Power (W/m): | 5.0 | 5.0 | 5.0 | 4.9 |
| Power Factor: | NA | NA | NA | NA |
| Total Light Output (lm): | 580 | 600 | 530 | 540 |
| Total Emergency Light Output (lm): | NA | NA | NA | NA |
| Efficacy (lm/cctW): | 116 | 120 | 106 | 110 |
| Lux at 1m (lux): | 190 | 200 | 180 | 180 |
| Emergency Lux at 1m (lux): | NA | NA | NA | NA |
| CCT (K): | 3000 | 4000 | 3000 | 4000 |
| CRI: | 90 | 90 | 90 | 90 |
| SDCM: | 6 | 6 | 6 | 6 |
| UGR: | 28.1 | 28.1 | 24.4 | 24.7 |
| IP: | 20 | 20 | 65 | 65 |
| Operation Temperature (°C): | -20 ≤ Ta ≤ +40 | -20 ≤ Ta ≤ +40 | -20 ≤ Ta ≤ +40 | -20 ≤ Ta ≤ +40 |
| Inrush Current: | NA | NA | NA | NA |
| Energy Class: | F | F | F | F |
| Rated Life to L70B50 (Hrs): | 30000 | 30000 | 30000 | 30000 |
| Dimensions LxWxH (mm): | 5000/10000x8x1.4 | 5000/10000x8x1.4 | 5000/10000x10x4 | 5000/10000x10x4 |
| Weight (kg): | 0.075/0.15 | 0.075/0.15 | 0.25/0.45 | 0.25/0.45 |

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

Cone Illuminance Diagram

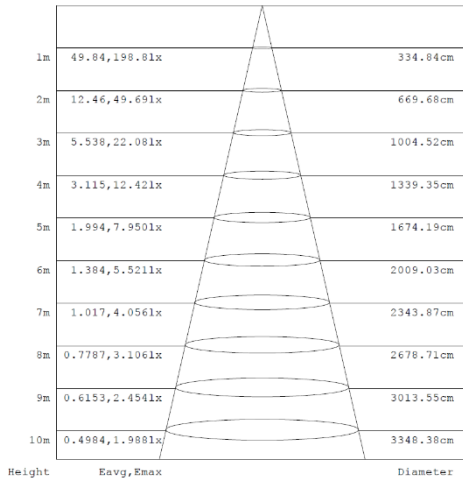


Diagram for RVE4K5 in 4000K. Other diagrams available on request

Polar Intensity Diagram


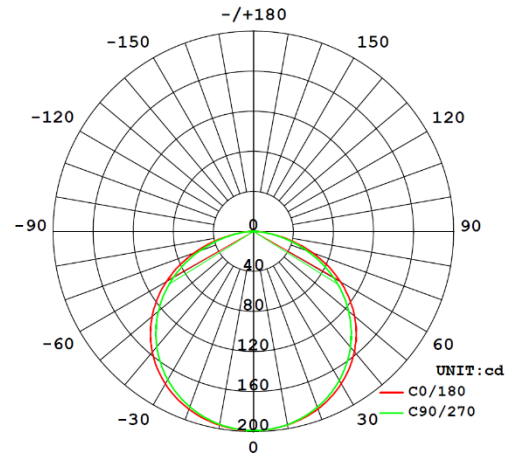


Diagram for RVE4K5 in 4000K. Other diagrams available on request

Dimension Diagram

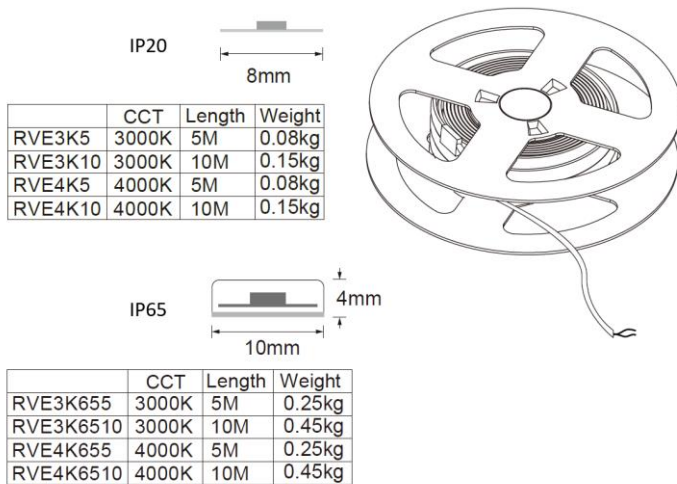

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
 WEB: ROBUS.COM
 WEB: ROBUS.COM.AU
 WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA