



## PRODUCT INFORMATION DOCUMENT

### CONSTRUCTION

- FPC copper substrate PCB
- 1000mm 2x18AWG input wires

### FEATURES

- Flexible design allows to create sharp, precise corners
- Very high CRI >90 making it ideal for applications requiring best colour reproduction
- 3000K, 4000K single colour options
- IP20 versions for indoor applications
- Can be cut every 10cm and reconnected as required.
- Compatible with all VEGAS CCT1 connectors
- Choose from wide range of power supplies to match the length of used striplight
- Remote and wall mounted controllers available as accessories



WARRANTY



LIFETIME



LUMENS  
PER W



IP RATING



OPERATING  
VOLTAGE



BEAMANGLE



DIMMING



CCT



SAFETY  
CLASS

Product Code:	RVZ485-30	RVZ485-40
Comparable to:	NA	NA
Total Power (W/m):	4.9	5.0
Power Factor:	NA	NA
Total Light Output (lm):	470	500
Total Emergency Light Output (lm):	NA	NA
Efficacy (lm/cctW):	96	100
Lux at 1m (lux):	150	160
Emergency Lux at 1m (lux):	NA	NA
CCT (K):	3000	4000
CRI:	90	90
SDCM:	6	6
UGR:	27.2	27.5
IP:	20	20
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	NA	NA
Energy Class:	F	F
Rated Life to L70B50 (Hrs):	30000	30000
Dimensions LxWxH (mm):	5000x8x2	5000x8x2
Weight (kg):	0.11	0.11

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

**PLEASE NOTE:** INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000  
UK: TEL: 0800 973 220  
AUS: TEL: +61 7 3890 5444  
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM  
WEB: ROBUS.COM  
WEB: ROBUS.COM.AU  
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

Cone Illuminance Diagram



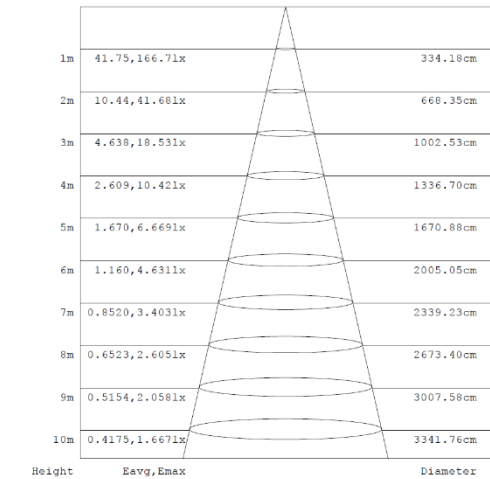


Diagram for RVZ485-40 in 4000K. Other diagrams available on request

Polar Intensity Diagram

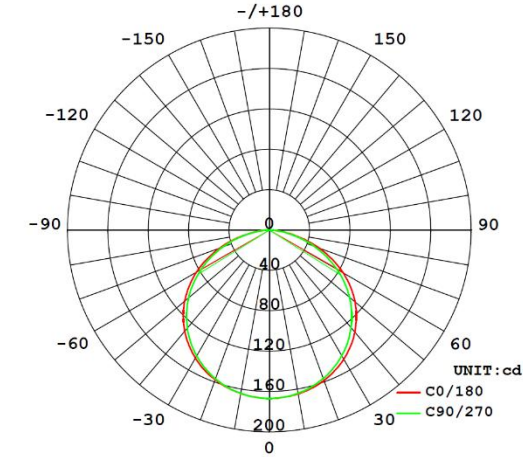

Dimension Diagram

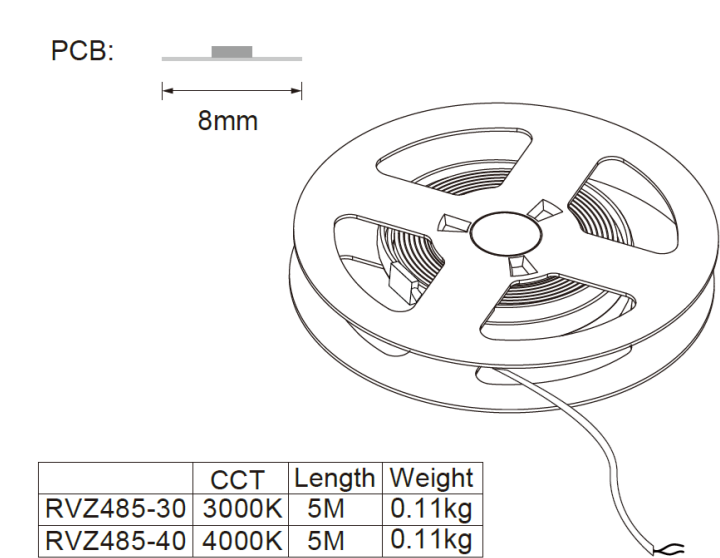

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE