

PIR Connect, WIFI, IP20, White

The PIR CONNECT detects motion in its sensing zone and uses the Robus Connect App to integrate all system functions including Notifications when activated and Triggers for activating automations and scenes. It is ideal for turning on lighting automatically when people enter rooms or leave bedrooms to go to the bathroom. It is also energy saving as it can be used to ensure lighting is switched off when not activated



**Applications:**

- Indoor use
- All areas of the home
- Common areas
  - Hallway
  - Landing
  - Kitchen
  - Bathroom
- Can be used to activate other ROBUS CONNECT devices


**Construction:**

- Fully polycarbonate
- Mounting with wood screws or 3M tape
- 1.2m USB cable provided



Product Code:	RCDS-01
Comparable to:	NA
Total Power [W]:	0.2
Warranty (yrs):	2
Ingress Protection (IP):	20
Operating Temperature (°C):	0 ≤ Ta ≤ +40
Height (mm):	68
Diameter (mm):	56
Box Qty:	1
Weight (kg):	0.02

**Standards & Approvals:**

Complies with: EN 61000-6-1, EN 61000-6-3, IEC 62321, IEC 62321-3-1, IEC 62321-4, IEC 62321-5, IEC 62321-6, IEC 62321-7-1



**Detection Zone Diagram:**

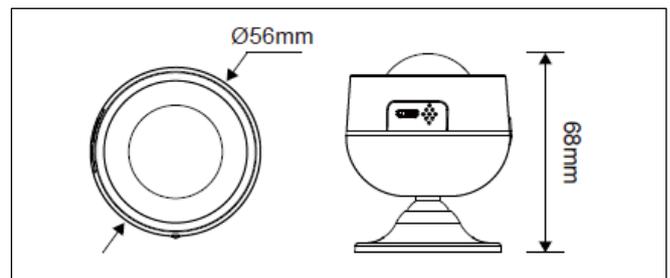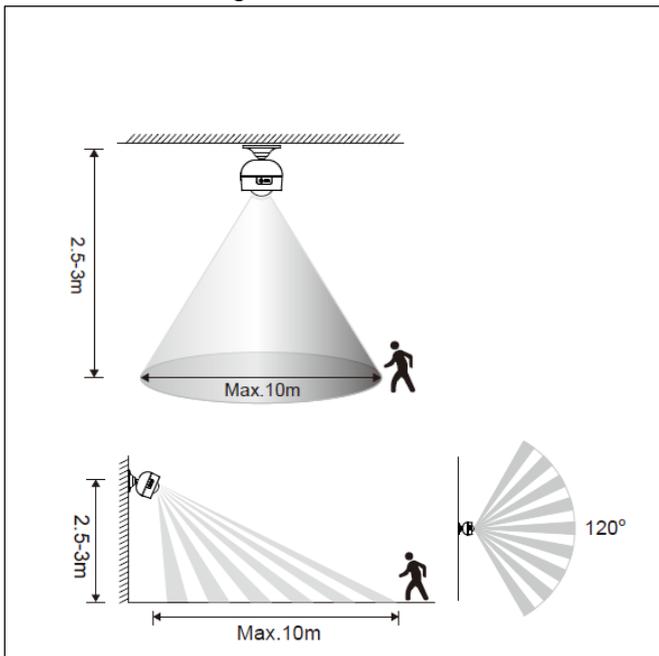

**ROBUS CONNECT APP QR CODE:**



PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE