

ROBUS®

VEGAS 4.8W/M, 12V, 60LED/M, LED STRIP LIGHT, 3000K/4000K, IP20, 50M

RVA48302050 RVA48402050

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician

Note:

Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site

www.robus.com.au

-20°C < Ta < +40°C, DC 12V, Class III, IP20
Suitable for mounting on a normally flammable surface.

Installation

1. Ensure mains supply is switched off before commencing work.
2. Cut the LED strip to the required length at the locations marked on the strip (Every 3 LED's).
3. Connectors are used to connect power to or join the LED strip, please select the most appropriate connector. The connector is marked with black and red wires, which will correspond with "-" and "+" on the LED strip. Connect connector to strip. Ensure correct wiring sequence. Open connector insert strip and press down until it is secure. (Note that when the wire connector is used to connect to AMP or extending the strip the connection sequence will be reversed on the next connection).
3. Mounting the Strip: Self-adhesive strip: Remove the protective film to reveal adhesive strip. Place the strip onto the desired location and press down firmly. Ensure the strip is secure.
5. Please see installation diagram and choose the most suitable installation method.
Note: When connected in series it is not possible to extend the strip to lengths longer than 10m. However, strips may be connected in parallel up to the max rating of the power supply used
6. Connect the strips to the driver (choose the correct 12V driver based on the length of the strip).
7. When attaching the connector to the LED strip ensure that wiring sequence is correct and that the strip is secure
8. Care must be taken to ensure the correct wiring sequence.

Note: Please take care not to damage the LEDs, during installation.





Accessories:

RVA48-CONN, RVA48L-CONN, RVA48T-CONN, RVA48X-CONN

The Installation must be carried out by a qualified electrician

LED Group Australasia
9/210 Queensport Road North
Murarrie
QLD 4172
Australia
Tel: 07 3890 5444
Fax: 07 3890 4777
Email: purchases@robus.com
Website: www.robus.com.au

LED Group
Crowe Hogwarth
72 Trafalgar Square
NELSON 7010
New Zealand
Tel: +64 0508 533 335
Email: nz_purchases@robus.com
Website: www.robusled.co.nz

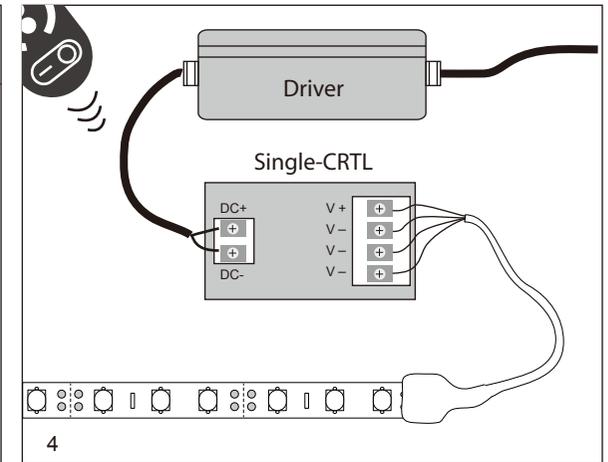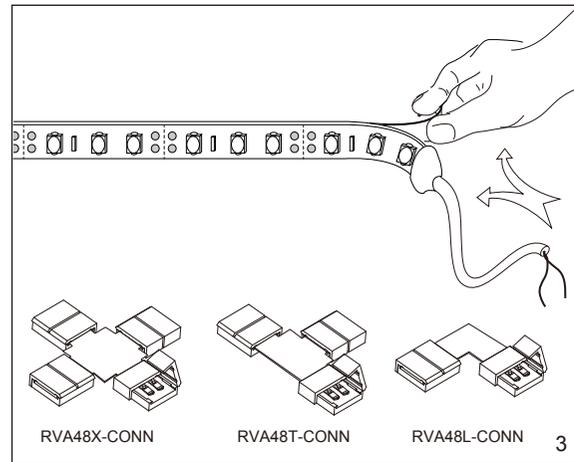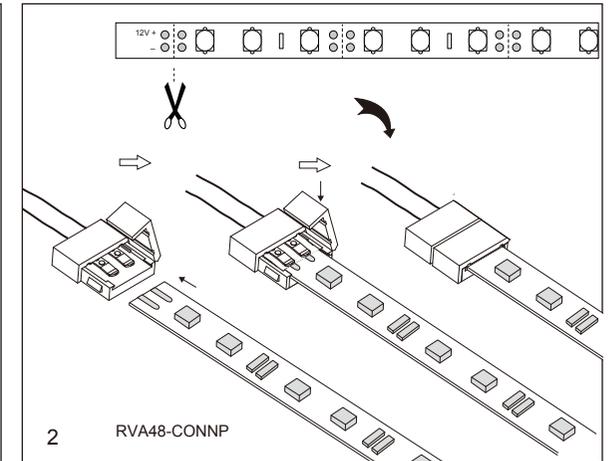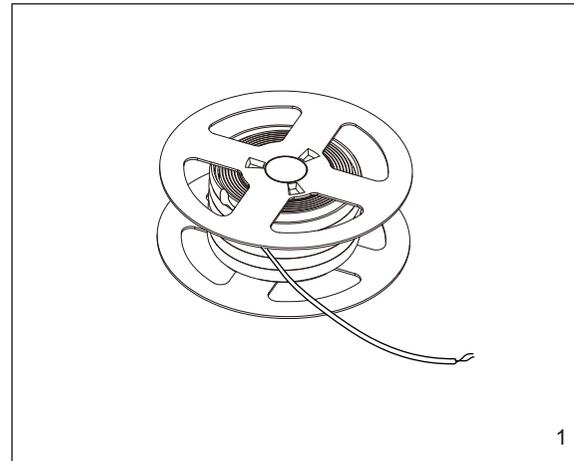

Single-CRTL & Single-AMP

