

C-1900 JetStream **Cable Blowing Machine**

The C-1900 has been designed to provide maximum cable protection, combined with the performance and reliability of hydraulic drive. The profiled double drive belt system is driven by single 32cc hydraulic motor, powered by the proven C-1203-F power pack.

The electronic monitoring system provides read-out of speed and distance, gives protection against duct obstructions and includes emergency stop facility.

The C-1900 is adjustable to suit a wide range of cable diameters 6-20mm, and duct diameters 12-50mm o/d.

Main Features


- Automatic Cable Centralisation
- Synchronous high grip profiled drive belts
- Tabletop design
- Variable speed control
- Single person operation
- Digital cable speed and length monitoring
- Integral air valve and pressure gauge
- Easy cable threading
- Polycarbonate safety guarding
- Low maintenance
- Wheeled Travel case
- Tool kit

SPECIFICATION

Cable Range:	6-20mm
Duct Range:	12-50mm
Cable Speed:	85m/min
Pushing Force:	600N
Maximum Air Pressure:	15 Bar
Drive Media:	Hydraulic
Drive Type:	Profiled Belt
Drive Orientation:	Horizontal
Cable Speed Measurement:	Proximity Switch

Shipping Specification (In Transit Case) **JetStream Only**

Length:	700mm
Width:	590mm
Height:	550mm
Weight:	60Kg

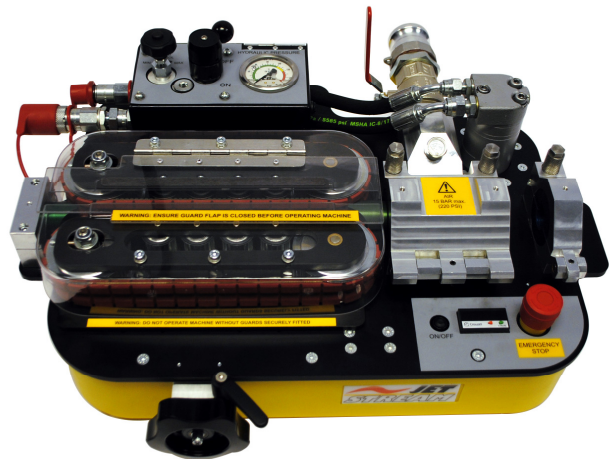

ORDERING DETAILS

Part No	Description
C-1900	JetStream Cable Blowing Machine