




**V3**

Robust and powerful, pneumatic operated fiber blowing machine designed for single cables and for relining of multiple micro ducts. Configuration can be made for cable between 4 and 40 mm and duct dimensions between 10 and 63 mm. The unique Joystick controller and the agile motors securing a optimal control of the installation. With an anodized aluminum construction, the machine is lightweight but still very strong.






## FIBER BLOWING MACHINE FOR CABLE 4-40 MM / DUCT 10-63 MM


- Pneumatic operation, double motors.
- Electronic counter for speed and distance.
- Gentle operation with long contact surface on the cable.
- Display for speed, distance and pressure in duct.
- Max. speed 120 m/min, max pushing force on cable 1200 N.
- Adjustable clamping force.
- Option of sub-ducting kit for installing several micro ducts. Example: 7x7/3.5 mm or 4x14/10 mm in a 50 mm tube simultaneously.
- Works with JetLogger
- Joystick Controller with forward and reverse function.
- Duct air quick release valve.

### NEW FUNCTIONS!


**Duct Air Release:** Duct Air Release Valve, making the reduction of air from the duct very fast.

## TECHNICAL DATA


-  **Max pressure:**  
16 Bar
-  **Pushing force:**  
up to 1200 N
-  **Cable diameter:**  
4 - 40 mm
-  **Duct diameter:**  
10 - 63 mm
-  **Weight:**  
approx 22 kg
-  **Air connection:**  
1" Claw connector
-  **WxHxD**  
700x300x310

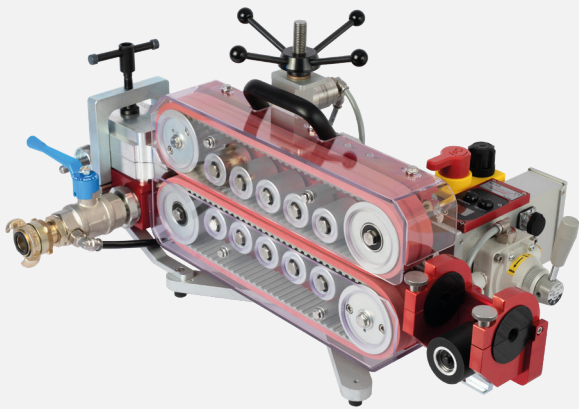

V3 FIBER BLOWING MACHINE

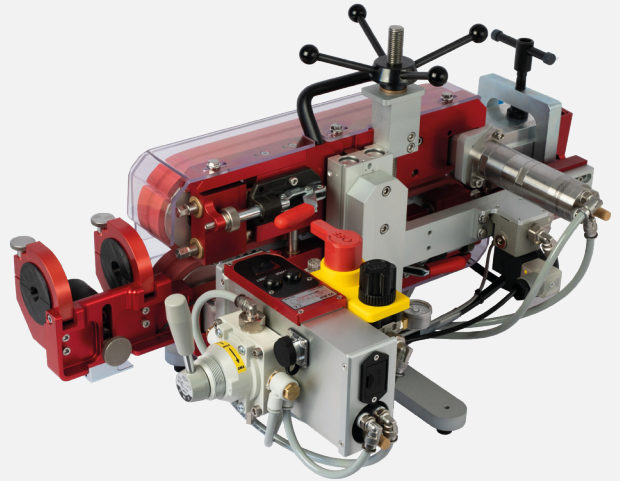

V3 FIBER BLOWING MACHINE

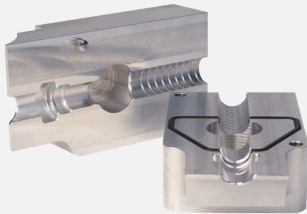


DUCT CLAMP (AVAILABLE FOR 10-63 MM DUCT)




AFTERBLOWER




CABLE GUIDE (AVAILABLE IN 5 DIFFERENT SIZES)

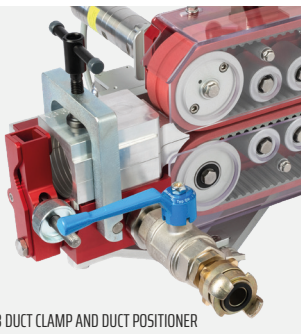

V3 DUCT CLAMP AND DUCT POSITIONER



JOYSTICK CONTROLLER



DUCT AIR VALVE



AIR REGULATOR WITH EMERGENCY STOP

## STD CONFIGURATION V3

- Transport case
- Extra fixtur
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- 1 bottle pneumatic oil
- Service kit
- 12 mm cabels guides

## ACCESSORIES FOR V3

- Afterblower
- Floating kit
- 9-12 V adaptor. For replacing 9 V battery for digital display
- Duct air quick release valve
- Jetlogger
- Duct clamps
- Cabel guides for 15, 22, 26 and 34 mm
- Cabel seals